



Lowered cooling table

Technical drawing

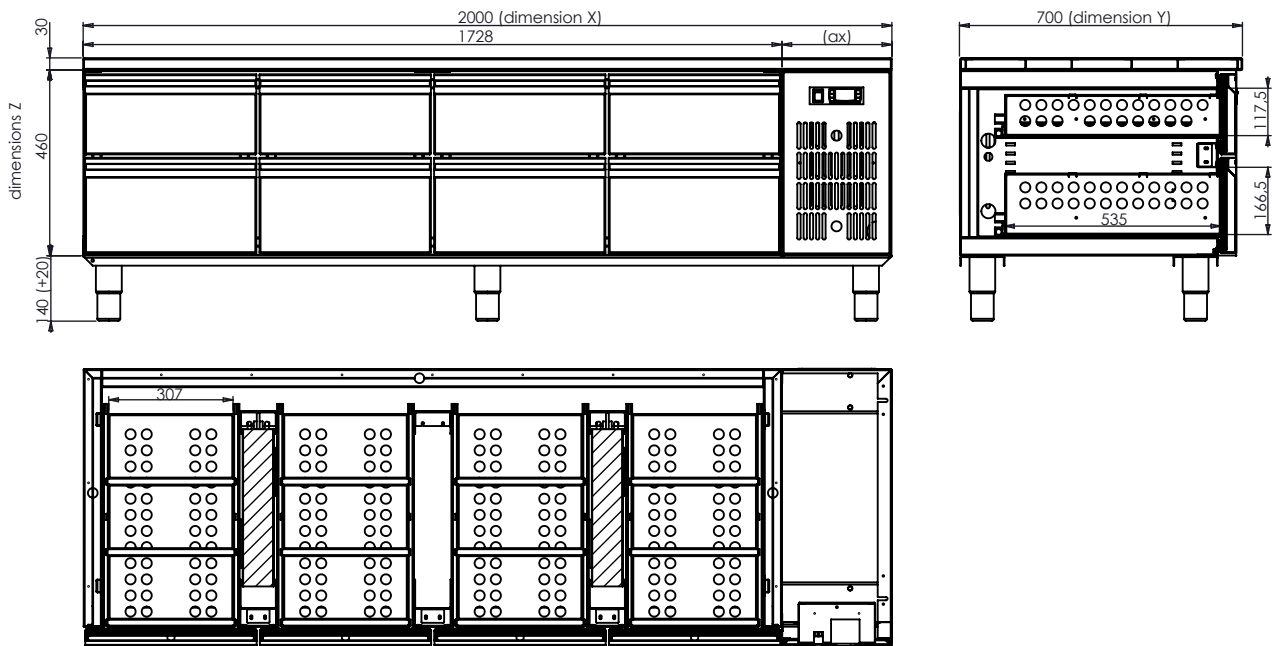

*variation without a top plate and feet

Illustrative pictures



SPECIFICATION LIST

MODEL	I.	II.	III.	IV.
Outside dimension:				
Width (x) [mm]	800	1200	1600	2000
Depth (y) [mm]	700	700	700	700
Height (z) [mm] + legs (w/o top plate)	460 + (140+20)	460 + (140+20)	460 + (140+20)	460 + (140+20)
Aggregate width (ax) [mm]	268	336	304	272
SPL (distance 1m)	35 - 50 dB(A)			
Temperature	1°C ~ 6°C			
Cooling medium	R600	R600	R600	R290
Refr. capacity (evap. @ -10°C)	0,13kW	0,17kW	0,28kW	0,35kW
Izolation	45mm			
Voltage	1, N, PE ~ 230V, 50Hz			
Power input	0,12kW	0,17kW	0,23kW	0,26kW
Material	Stainless steel			