





Technical drawing

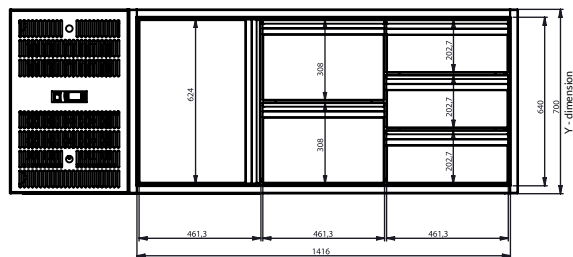


DOOR




SOCKET 1/2

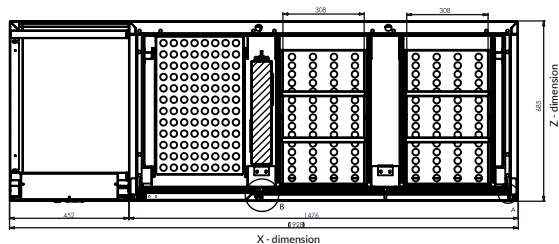

Control panel



LEGS - Square tub

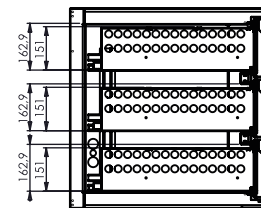

SOCKET 1/3

Illustrative pictures

Control panel - MIN








Control panel - Standard



Aggregate - MIN



Aggregate - Standard



## SPECIFICATION LIST

MODEL	GN1	GN2	GN3	GN4	GN5
<b>Outside dimension:</b>					
Width (x) [mm] w/o aggregate and CP	583	1007	1476	1946	2415
Width (x) [mm] standard aggregate	1035	1459	1928	2398	2867
Width (x) [mm] standard control panel	763	1187	1656	2126	2595
Depth (y) [mm] x Height (z) [mm]	685 x 700				
SPL (distance 1m)	35 - 50 dB(A)				
Temperature	0°C +8°C				
Cooling medium	R600	R290	R290	R290	R290
Refr. capacity (evap. @ -10°C)	0,17kW	0,35kW	0,42kW	0,42kW	0,48kW
Izolation	45 mm				
Voltage	1, N, PE ~ 230V, 50Hz				
Power input	0,15kW	0,24kW	0,28kW	0,28kW	0,34kW
Material	Stainless steel 1.4301				
<b>Measurement in [mm]</b>	<b>Standard</b>		<b>Min</b>		
<b>AGGREGATE</b>					
Outside dimension: Width [mm]	452		270		
<b>CONTROL PANEL</b>					
Outside dimension: Width [mm]	180		100		