


## Technical drawing



## Illustrative pictures

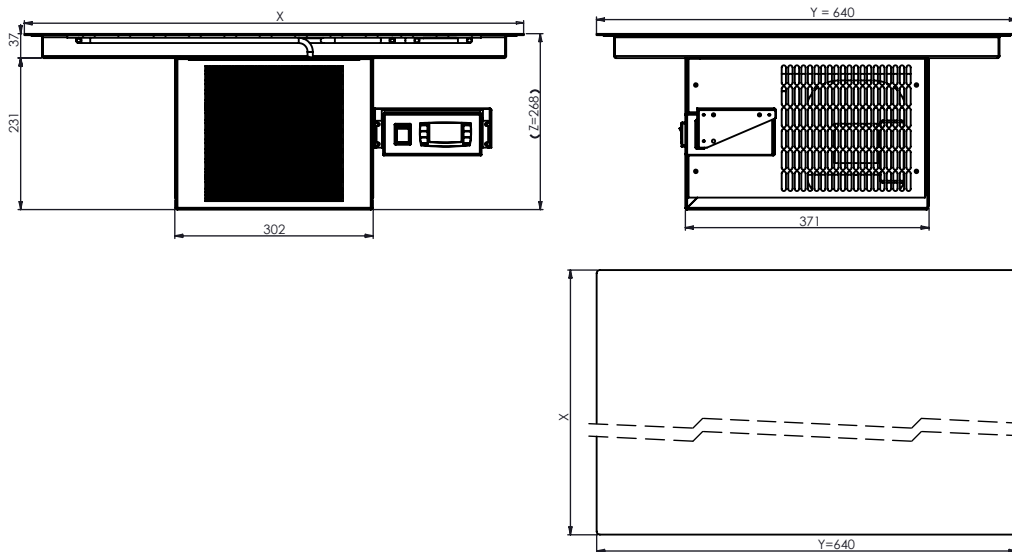

## SPECIFICATION LIST

MODEL	GN1	GN2	GN3	GN4	GN5	GN6
<b>Outside dimension:</b>						
Width (x) [mm]	435	760	1085	1410	1735	2060
Depth (y) [mm]	640	640	640	640	640	640
Height (z) [mm]	268	268	268	268	268	268
<b>Installation dimension:</b>						
Width (x) [mm]	415	740	1065	1390	1715	2040
Depth (y) [mm]	620	620	620	620	620	620
Temperature cooling	+2°C ~ +5°C					
Temperature heating	+30°C ~ 90 °C					
Cooling medium	R600	R600	R600	R290	R290	R290
Refr. capacity (evap. @ -10°C)	0,13kW	0,17kW	0,28kW	0,35kW	0,35kW	0,42kW
Voltage	1, N, PE ~ 230V, 50Hz					
Power input cooling	0,12kW	0,17kW	0,23kW	0,26kW	0,26kW	0,3kW
Power input heating	0,33kW	0,66kW	0,99kW	0,99kW	1,1kW	1,2kW
Material						