


Technical drawing

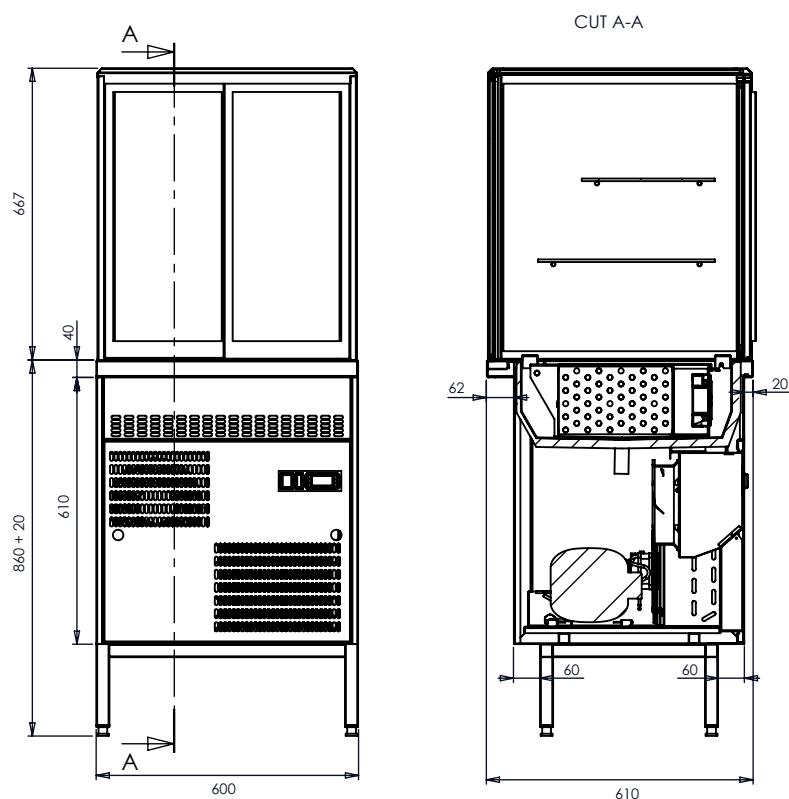

Specification list

Outside dimension:

Width (x) [mm]	600
Depth (y) [mm] x Height (z) [mm]	610 x 667 + 880
SPL (distance 1m)	35 - 50 dB(A)
Temperature	+3°C ~ +8°C
Cooling medium	R290
Refr. capacity (-10°C)	0,64kW
Voltage	1, N, PE ~ 230V, 50Hz
Power input	0,36kW
Power consumption	2,5A

Spare parts

VPT1-030101-RR-0010	Sliding doors - complete assembly	VPT1-030101-RR-0090	LED profile with LED strip
VPT1-030101-RR-0011	Left door	VPT1-030101-RR-0091	LED strip 1,8 m
VPT1-030101-RR-0012	Right door		
VPT1-030101-RR-0020	Glass extension - complete assembly		
VPT1-030101-RR-0021	Lower shelf 405mm		
VPT1-030101-RR-0022	Upper shelf 305mm		
VPT1-030101-RR-0030	Base - complete assembly (aggregate + control panel)		
97-500	Dixell XR60CH		
97-010 + 97-191	Switch - simple + cover		
97-011 + 97-038	Switch - double + cover		