

COOLING TECHNIQUE

0301 SHOWCASES

01 SHOWCASE BH

01 SHOWCASE BH - DROP-IN

GN - FOR TRAYS / EN - FOR TRAYS

02 SHOWCASE PB

03 SHOWCASE KE

06 SHOWCASE HANGEE

10 SHOWCASE SABRURA

WINE SHOWCASE

13 SHOWCASE SUSHI

14 SHOWCASE DE

EN - FOR TRAYS / GN - FOR TUBS

SHOWCASE FOR CAKES

15 SHOWCASE - EDEKA / NETTO EDEKA

0302 COOLING BOXES FOR KEGS

00 COOLING BOX FOR KEGS

02 COOLING BOTTLE BOX

0303 COOLING PLATES

0304 COOLING TUBS VENTILATED

OVER VENTILATED TUB - INCLINED 5°

INCLINED 8°

STRAIGHT/INCLINED

SNACK-GENIE

GASTROSNACK

0305 COOLING TUBS STATIC

0306 COOLING TABLES

01 BEVERAGE COOLING TABLE

02 COOLING TABLE GN

03 LOWERED COOLING TABLE

07 SALADETTE

08 COOLING SAUSAGE COUNTER

0307 FREEZING TABLES

01 FREEZING TABLE

0310 COOLING BOXES FOR DUSTBIN

0701 HEATING-COOLING PLATE

General information about our cooling devices:

- Digital control is part of the unit but can be installed externally up to 2.5m away from the device
- They are typically connected to a standard wastewater pipe
- Equipped with an electrical plug compatible with the European market
- Includes two connections for central cooling and CO2
- Copper pipes for central cooling and CO2

If you have any specific requests regarding the configuration of your cooling device,
don't hesitate to contact your sales representative for more detailed information.

About


Refrigerated showcase ensure great conditions for storing food and also help to eliminate the food getting out of their quality. Cuboid-shaped, promotional display, glass from each side of the showcase - designed to display objects through each side.

Suitable for shops or canteens, where customers can see the products inside the showcase. However only staff can get the products out (the doors are made only from one side of the showcase).

Made from stainless steel material, so it is easy to clean and guarantees a long-term service life. You can choose to light up a showcase or not.

Our showcases are designed with security in mind – we offer this showcase either in lockable or non-lockable version. If it comes to cover/opening, you can choose from tilting glass, sliding doors, or clapper doors.

Technical drawing

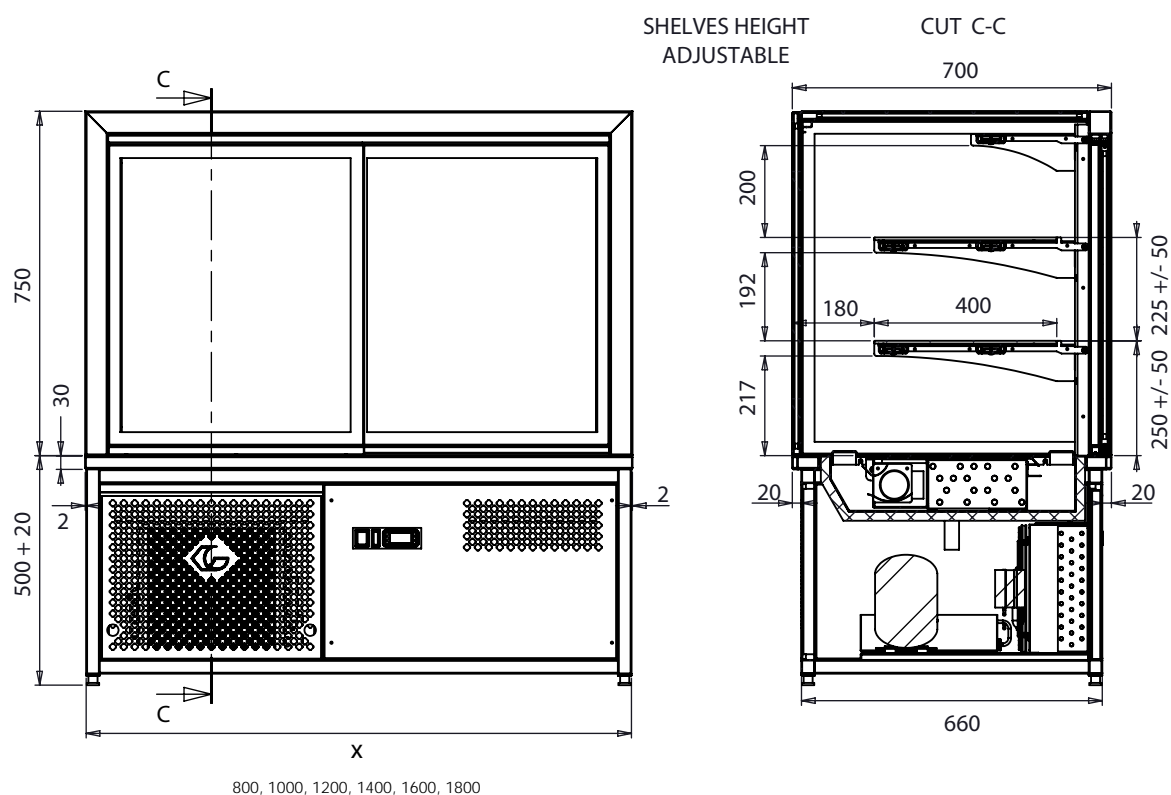

Illustrative pictures

800

1000

1200

1400

1600

1800



Specification list

| | 800 | 1000 | 1200 |
|--|-----------------------|--------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 800 | 1000 | 1200 |
| Depth (y) [mm] | 700 | | |
| Height (z) [mm] | 1250 + 20 | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,48kW | 0,55kW | 0,64kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,71kW | 0,85kW | 1kW |
| Current draw | 3,9A | 4,7A | 5,6A |
| Central cooled Power input / Current draw | ~ 0,08kW / ~ 2A | | |

| | 1400 | 1600 | 1800 |
|--|-----------------------|-------|-------|
| Outside dimension: | | | |
| Width (x) [mm] | 1400 | 1600 | 1800 |
| Depth (y) [mm] | 700 | | |
| Height (y) [mm] | 1250 + 20 | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0.9kW | 1kW | 1,2kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 1,1kW | 1,2kW | 1,3kW |
| Current draw | 5,8A | 6A | 6A |
| Central cooled Power input / Current draw | ~ 0,08kW / ~ 2A | | |

| Accessories | Order number | Price |
|--|--------------|-----------|
| LED white | 97-863 | standard |
| LED white - variable intensity, remote control | 97-681 | |
| Lock | | |
| Painting | | on demand |

With aggregate

| Model | Order number | Price |
|---------------------------------------|----------------|-------|
| BH 800, sliding doors, tipping glass | V1-030101-0001 | |
| BH 1000, sliding doors, tipping glass | V1-030101-0002 | |
| BH 1200, sliding doors, tipping glass | V1-030101-0003 | |
| BH 1400, sliding doors, tipping glass | V1-030101-0004 | |
| BH 1600, sliding doors, tipping glass | V1-030101-0005 | |
| BH 1800, sliding doors, tipping glass | V1-030101-0006 | |

Central cooled

| Model | Order number | Price |
|---------------------------------------|----------------|-------|
| BH 800, sliding doors, tipping glass | V1-030101-0007 | |
| BH 1000, sliding doors, tipping glass | V1-030101-0008 | |
| BH 1200, sliding doors, tipping glass | V1-030101-0009 | |
| BH 1400, sliding doors, tipping glass | V1-030101-0010 | |
| BH 1600, sliding doors, tipping glass | V1-030101-0011 | |
| BH 1800, sliding doors, tipping glass | V1-030101-0012 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

SHOWCASE BH - DROP-IN

GN - FOR TRAYS (FRAME DESIGN)

About

Refrigerated showcase ensure great conditions for storing food and also help to eliminate the food getting out of their quality. The BH Showcase drop-in is designed to be inserted into the worktop.


The lower part is used for GN trays, which are at the same level as the worktop. You can choose a variant with one, two or three shelves that are height adjustable. Only service can take out the goods, because the door opens only from the service's side.

Glass from each side of the showcase - designed to display objects through each side.

Suitable for shops or canteens, where customers can see the products inside the showcase.

Made from stainless steel material, so it is easy to clean and guarantees a long-term service life. You can choose to light up a showcase or not.

Technical drawing

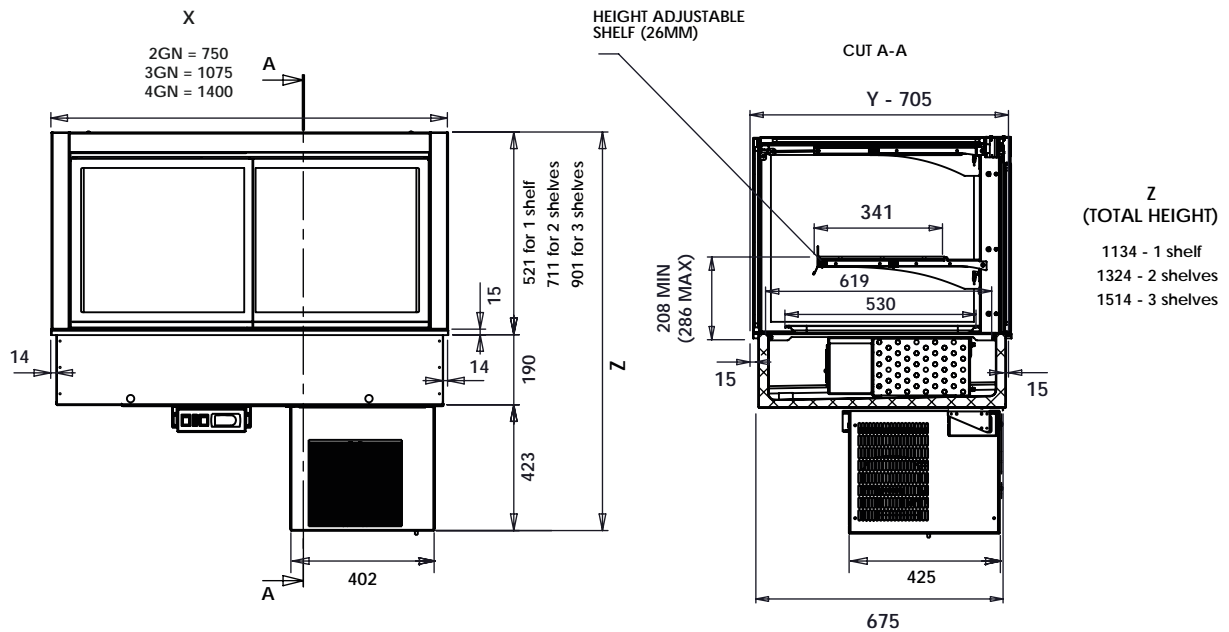

Illustrative pictures

1 shelf

2 shelves

3 shelves



Specification list

| | 2GN | | | 3GN | | | 4GN | | |
|--|-----------------------|-----|-----|-------|-----|-----|-------|-----|-----|
| Number of Shelves | 1x | 2x | 3x | 1x | 2x | 3x | 1x | 2x | 3x |
| Outside dimension: | | | | | | | | | |
| Width (x) [mm] | 750 | | | 1075 | | | 1400 | | |
| Depth (y) [mm] | 705 | | | | | | | | |
| Height (z) [mm] (above the top plate) | 521 | 711 | 901 | 521 | 711 | 901 | 521 | 711 | 901 |
| Installation dimension: | | | | | | | | | |
| Width (x) [mm] | 737 | | | 1062 | | | 1387 | | |
| Depth (y) [mm] | 689 | | | | | | | | |
| Temperature | +3°C ~ +8°C | | | | | | | | |
| Cooling medium | R290 | | | | | | | | |
| Refr. capacity (evap. @ -10°C) | 0,64kW | | | 0,9kW | | | 1kW | | |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | | | | | | |
| Power input | 0,85kW | | | 1kW | | | 1,1kW | | |
| Current draw | 4,7A | | | 5,6A | | | 5,8A | | |
| Central cooled Power input / Current draw | ~ 0,08kW / ~ 2A | | | | | | | | |

| Accessories | Order number | Price |
|--|------------------|-------|
| Doors with soft close | VPT1-030101-5010 | |
| Electric evaporating tray | VPT1-030101-5011 | |
| „U„ air flow system, possible to put showcase to the wall | VPT1-030101-5012 | |
| Cover for „U“ air flow system | VPT1-030101-5013 | |
| Dividing strips for GN tub | VPT1-030101-5014 | |
| RAL coloring | VPT1-030101-5015 | |

Showcase BH - Drop-in for trays, 1 shelf

Showcase BH - GN for trays, with aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Showcase BH - Drop-in for trays 2GN, 1 shelf, wing doors | V1-030101-0190 | |
| Showcase BH - Drop-in for trays 3GN, 1 shelf, sliding doors | V1-030101-0191 | |
| Showcase BH - Drop-in for trays 4GN, 1 shelf, sliding doors | V1-030101-0192 | |

Showcase BH - GN for trays

| Model | Order number | Price |
|---|----------------|-------|
| Showcase BH - Drop-in for trays 2GN, 1 shelf, wing doors | V1-030101-0193 | |
| Showcase BH - Drop-in for trays 3GN, 1 shelf, sliding doors | V1-030101-0194 | |
| Showcase BH - Drop-in for trays 4GN, 1 shelf, sliding doors | V1-030101-0195 | |

Showcase BH - Drop-in for trays, 2 shelves

Showcase BH - GN for trays, with aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Showcase BH - Drop-in for trays 2GN, 2 shelves, wing doors | V1-030101-0196 | |
| Showcase BH - Drop-in for trays 3GN, 2 shelves, sliding doors | V1-030101-0197 | |
| Showcase BH - Drop-in for trays 4GN, 2 shelves, sliding doors | V1-030101-0198 | |

Showcase BH - GN for trays

| Model | Order number | Price |
|---|----------------|-------|
| Showcase BH - Drop-in for trays 2GN, 2 shelves, wing doors | V1-030101-0199 | |
| Showcase BH - Drop-in for trays 3GN, 2 shelves, sliding doors | V1-030101-0200 | |
| Showcase BH - Drop-in for trays 4GN, 2 shelves, sliding doors | V1-030101-0201 | |

Showcase BH - Drop-in for trays, 3 shelves

Showcase BH - GN for trays, with aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Showcase BH - Drop-in for trays 2GN, 3 shelves, wing doors | V1-030101-0202 | |
| Showcase BH - Drop-in for trays 3GN, 3 shelves, sliding doors | V1-030101-0203 | |
| Showcase BH - Drop-in for trays 4GN, 3 shelves, sliding doors | V1-030101-0204 | |

Showcase BH - GN for trays

| Model | Order number | Price |
|---|----------------|-------|
| Showcase BH - Drop-in for trays 2GN, 3 shelves, wing doors | V1-030101-0205 | |
| Showcase BH - Drop-in for trays 3GN, 3 shelves, sliding doors | V1-030101-0206 | |
| Showcase BH - Drop-in for trays 4GN, 3 shelves, sliding doors | V1-030101-0207 | |

* The evaporation tub is not included as a standard part of the product; it must be specified when placing the order.

SHOWCASE BH - DROP-IN

EN - FOR TRAYS (FRAME DESIGN)

About

Refrigerated showcase ensure great conditions for storing food and also help to eliminate the food getting out of their quality. The BH Showcase drop-in is designed to be inserted into the worktop.


The lower part is used for euronorm trays, which are at the same level as the worktop. You can choose a variant with one, two or three shelves that are height adjustable. Only service can take out the goods, because the door opens only from the service's side.

Glass from each side of the showcase - designed to display objects through each side.

Suitable for shops or canteens, where customers can see the products inside the showcase.

Made from stainless steel material, so it is easy to clean and guarantees a long-term service life. You can choose to light up a showcase or not.

Technical drawing

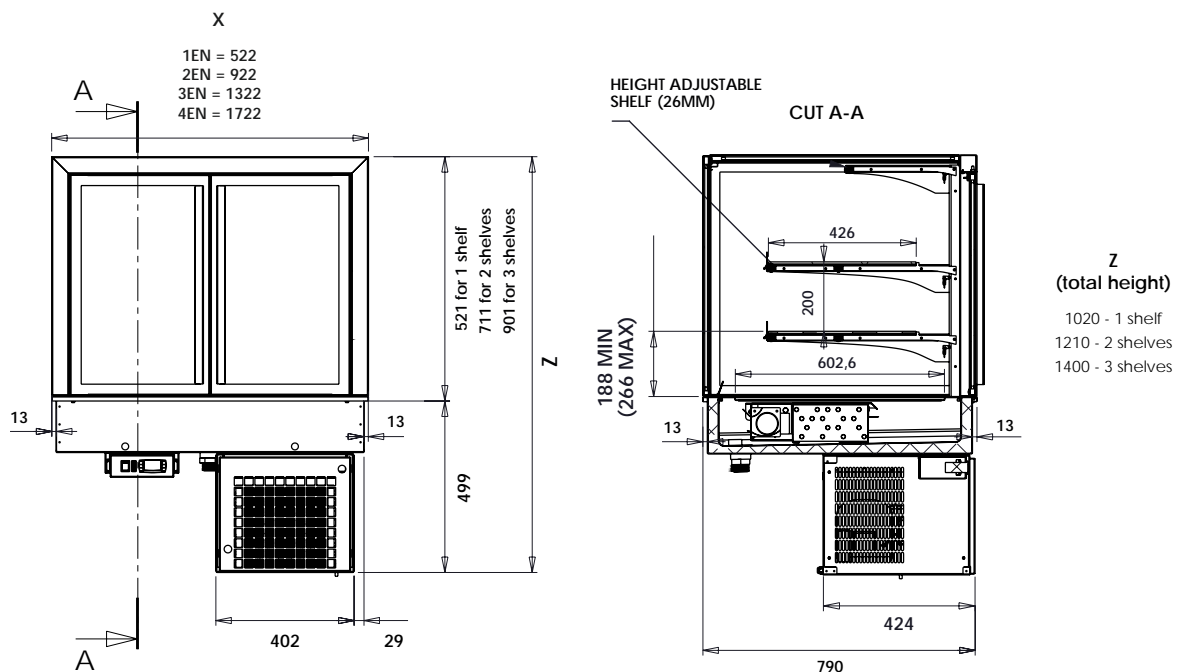

Illustrative pictures

1 shelf

2 shelves

3 shelves



Specification list

| | 1EN | | | 2EN | | |
|--|-----------------------|-----|-----|-------|-----|-----|
| Number of Shelves | 1x | 2x | 3x | 1x | 2x | 3x |
| Outside dimension: | | | | | | |
| Width (x) [mm] | 522 | | | 922 | | |
| Depth (y) [mm] | 795 | | | 795 | | |
| Height (z) [mm] (above the top plate) | 521 | 711 | 901 | 521 | 711 | 901 |
| Installation dimension: | | | | | | |
| Width (x) [mm] | 509 | | | 909 | | |
| Depth (y) [mm] | 779 | | | | | |
| Temperature | +3°C ~ +8°C | | | | | |
| Cooling medium | R290 | | | | | |
| Refr. capacity (evap. @ -10°C) | 0,55kW | | | 0,9kW | | |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | | | |
| Power input | 0,71kW | | | 1kW | | |
| Current draw | 3,9A | | | 5,6A | | |
| Central cooled Power input / Current draw | ~ 0,08kW / ~ 2A | | | | | |

| | 3EN | | | 4EN | | |
|--|-----------------------|-----|-----|-------|-----|-----|
| Number of Shelves | 1x | 2x | 3x | 1x | 2x | 3x |
| Outside dimension: | | | | | | |
| Width (x) [mm] | 1322 | | | 1722 | | |
| Depth (y) [mm] | 795 | | | 795 | | |
| Height (z) [mm] (above the top plate) | 521 | 711 | 901 | 521 | 711 | 901 |
| Installation dimension: | | | | | | |
| Width (x) [mm] | 1309 | | | 1709 | | |
| Depth (y) [mm] | 779 | | | | | |
| Temperature | +3°C ~ +8°C | | | | | |
| Cooling medium | R290 | | | | | |
| Refr. capacity (evap. @ -10°C) | 1kW | | | 1,2kW | | |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | | | |
| Power input | 1,2kW | | | 1,3kW | | |
| Current draw | 6A | | | 6A | | |
| Central cooled Power input / Current draw | ~ 0,08kW / ~ 2A | | | | | |

| Accessories | Order number | Price |
|--|------------------|-------|
| Doors with soft close | VPT1-030101-5010 | |
| Electric evaporating tray | VPT1-030101-5011 | |
| „U„ air flow system, possible to put showcase to the wall | VPT1-030101-5012 | |
| Cover for „U“ air flow system | VPT1-030101-5013 | |
| Dividing strips for GN tub | VPT1-030101-5014 | |
| RAL coloring | VPT1-030101-5015 | |

| Showcase BH - Drop-in for trays, 1 shelf

| with aggregate | | | Central cooled | | |
|--|----------------|-------|--|----------------|-------|
| Model | Order number | Price | Model | Order number | Price |
| Showcase BH - Drop-in for trays 1EN, 1 shelf, wing doors | V1-030101-0238 | | Showcase BH - Drop-in for trays 1EN, 1 shelf, wing doors | V1-030101-0242 | |
| Showcase BH - Drop-in for trays 2EN, 1 shelf, wing doors | V1-030101-0239 | | Showcase BH - Drop-in for trays 2EN, 1 shelf, wing doors | V1-030101-0243 | |
| Showcase BH - Drop-in for trays 3EN, 1 shelf, sliding doors | V1-030101-0240 | | Showcase BH - Drop-in for trays 3EN, 1 shelf, sliding doors | V1-030101-0244 | |
| Showcase BH - Drop-in for trays 4EN, 1 shelf, sliding doors | V1-030101-0241 | | Showcase BH - Drop-in for trays 4EN, 1 shelf, sliding doors | V1-030101-0245 | |

| Showcase BH - Drop-in for trays, 2 shelves

| with aggregate | | | Central cooled | | |
|--|----------------|-------|--|----------------|-------|
| Model | Order number | Price | Model | Order number | Price |
| Showcase BH - Drop-in for trays 1EN, 2 shelves, wing doors | V1-030101-0246 | | Showcase BH - Drop-in for trays 1EN, 2 shelves, wing doors | V1-030101-0250 | |
| Showcase BH - Drop-in for trays 2EN, 2 shelves, wing doors | V1-030101-0247 | | Showcase BH - Drop-in for trays 2EN, 2 shelves, wing doors | V1-030101-0251 | |
| Showcase BH - Drop-in for trays 3EN, 2 shelves, sliding doors | V1-030101-0248 | | Showcase BH - Drop-in for trays 3EN, 2 shelves, sliding doors | V1-030101-0252 | |
| Showcase BH - Drop-in for trays 4EN, 2 shelves, sliding doors | V1-030101-0249 | | Showcase BH - Drop-in for trays 4EN, 2 shelves, sliding doors | V1-030101-0253 | |

| Showcase BH - Drop-in for trays, 3 shelves

| with aggregate | | | Central cooled | | |
|--|----------------|-------|--|----------------|-------|
| Model | Order number | Price | Model | Order number | Price |
| Showcase BH - Drop-in for trays 1EN, 3 shelves, wing doors | V1-030101-0254 | | Showcase BH - Drop-in for trays 1EN, 3 shelves, wing doors | V1-030101-0258 | |
| Showcase BH - Drop-in for trays 2EN, 3 shelves, wing doors | V1-030101-0255 | | Showcase BH - Drop-in for trays 2EN, 3 shelves, wing doors | V1-030101-0259 | |
| Showcase BH - Drop-in for trays 3EN, 3 shelves, sliding doors | V1-030101-0256 | | Showcase BH - Drop-in for trays 3EN, 3 shelves, sliding doors | V1-030101-0260 | |
| Showcase BH - Drop-in for trays 4EN, 3 shelves, sliding doors | V1-030101-0257 | | Showcase BH - Drop-in for trays 4EN, 3 shelves, sliding doors | V1-030101-0261 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

This type of showcase is freestanding on the floor, which is suitable for almost every kitchen. Refrigerated showcase ensure a great conditions for storing food and also helps eliminate the food getting out of their quality. Suitable for shops, canteens or gas station, where customers can take the products out of the showcase on their own (without any help of the staff).

Made from stainless steel material, so it is easy to clean and guarantees a long term service life. You can choose to light up a showcase or not.

Our showcases are designed with security in mind – we offer this showcase either in lockable or non-lockable version. Every design brings you comfort.

Technical drawing

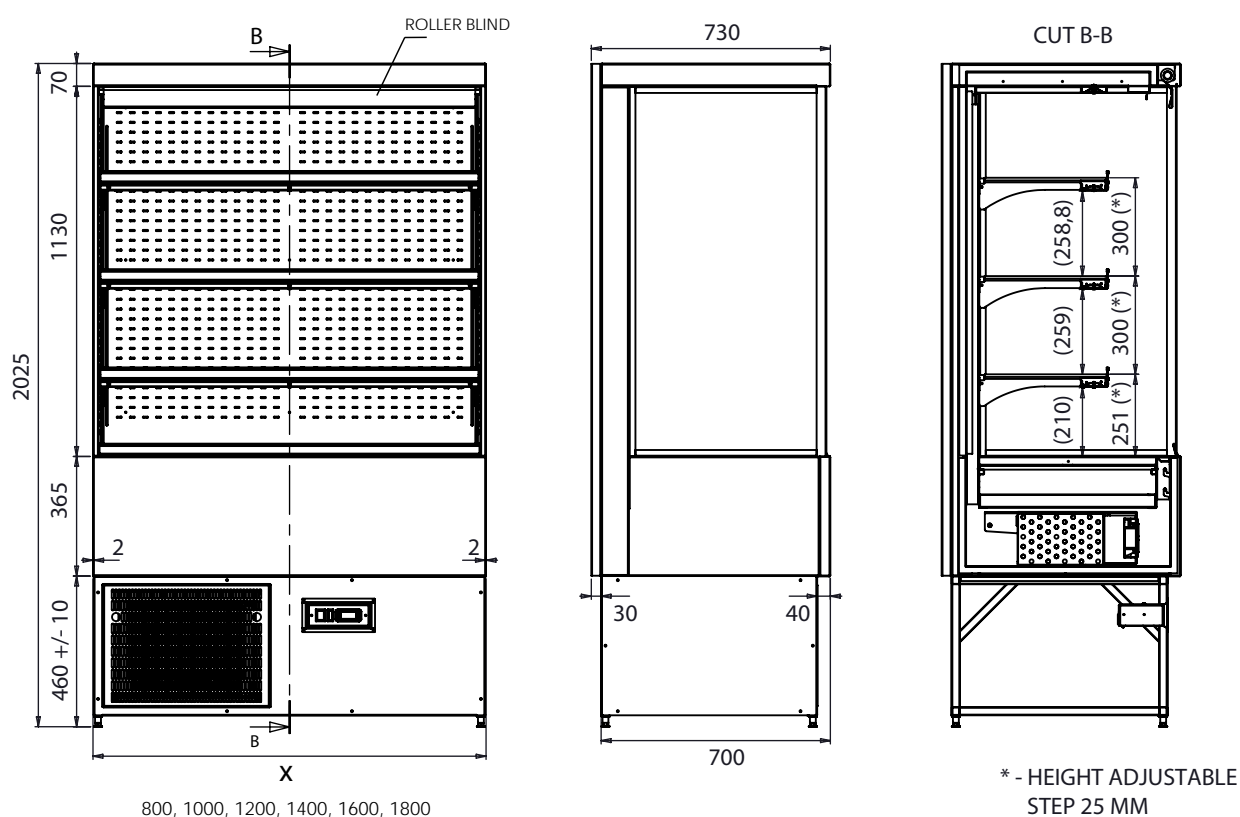

Illustrative pictures



Specification list

| | 800 | 1000 | 1200 | 1400 | 1600 | 1800 |
|--|-----------------------|-------|--------|-------|-------|--------|
| Models | | | | | | |
| Outside dimension: | | | | | | |
| Width (x) [mm] | 800 | 1000 | 1200 | 1400 | 1600 | 1800 |
| Depth (y) [mm] | 730 | | | | | |
| Height (z) [mm] | 2025 | | | | | |
| Temperature | +3°C ~ +8°C | | | | | |
| Cooling medium | R290 | | | | | |
| Refr. capacity (evap. @ -10°C) | 1,2kW | 1,2kW | 1,4kW | 1,6kW | 2kW | 2kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | | | |
| Power input | 0,82kW | 0,9kW | 1,05kW | 1,3kW | 1,3kW | 1,25kW |
| Current draw | 4,1A | 4,1A | 4,7A | 6,65A | 6,65A | 5,6A |
| Central cooled Power input / Current draw | ~ 0,15kW / ~ 2A | | | | | |

| Accessories | Order number | Price |
|--|--------------|-----------|
| LED white | 97-757 | standard |
| LED white - variable intensity, remote control | 97-681 | |
| Lock | | |
| Painting | | On demand |

With aggregate

| Model | Order number | Price |
|--------------------|----------------|-------|
| PB 800, 3 shelves | V1-030102-0001 | |
| PB 1000, 3 shelves | V1-030102-0002 | |
| PB 1200, 3 shelves | V1-030102-0003 | |
| PB 1400, 3 shelves | V1-030102-0004 | |
| PB 1600, 3 shelves | V1-030102-0005 | |
| PB 1800, 3 shelves | V1-030102-0006 | |

Central cooled

| Model | Order number | Price |
|--------------------|----------------|-------|
| PB 800, 3 shelves | V1-030102-0007 | |
| PB 1000, 3 shelves | V1-030102-0008 | |
| PB 1200, 3 shelves | V1-030102-0009 | |
| PB 1400, 3 shelves | V1-030102-0010 | |
| PB 1600, 3 shelves | V1-030102-0011 | |
| PB 1800, 3 shelves | V1-030102-0012 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

Free-standing showcases with cooling table situated under the showcase. Suitable for supermarkets or canteens, where customers can see the products inside the showcase. Refrigerated showcase ensure a great conditions for storing food and also helps eliminate the food getting out of their quality and freshness.

There is enter on each side – the customer side and service side. Glass from each side of the showcase - for an ideal visual offer of goods.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life. You can choose to light up a showcase or not. Gastro offers a lockable or non-lockable version of these showcases.

Technical drawing

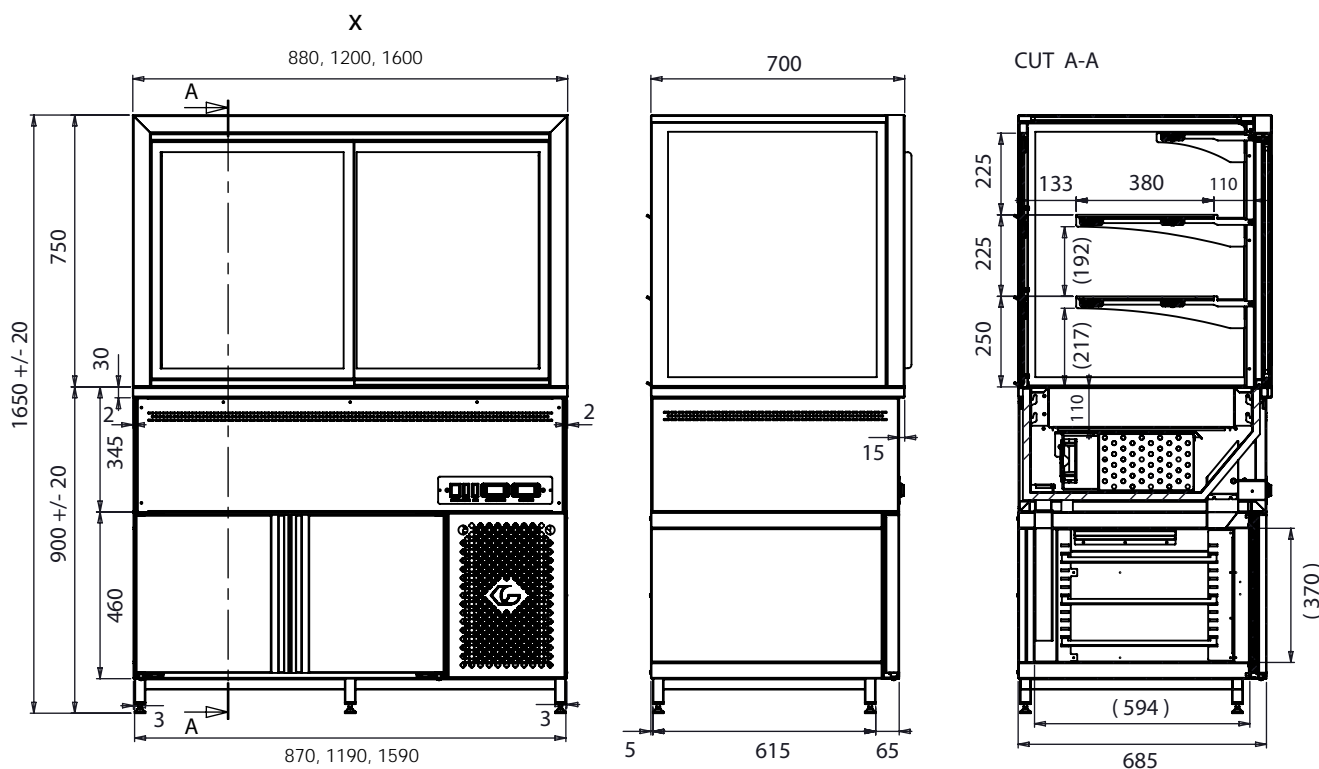

Illustrative pictures



Specification list (with cooling table)

| | 880 | 1200 | 1600 |
|--|-----------------------|-------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 880 | 1200 | 1600 |
| Depth (y) [mm] | 700 | | |
| Height (z) [mm] | 1650 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 1kW | 1,2kW | 1,6kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,72kW | 0,9kW | 1,06kW |
| Current draw | 3,4A | 4A | 4,8A |
| Central cooled Power input / Current draw | ~ 0,08kW / ~ 0,75A | | |

| Accessories | Order number | Price |
|--|----------------|-------|
| Standard doors for Lowered Cooling tables | V1-030603-0012 | |
| Drawers 100 + 150 for Lowered Cooling tables | V1-030603-0013 | |
| Drawer 200 for Lowered Cooling tables | V1-030603-0014 | |
| LED white - variable intensity, remote control | 97-681 | |
| LED white | 97-863 | |
| Painting | | |
| Lock | | |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| KE 880 with cooling table under, Clappers, Sliding Doors | V1-030103-0001 | |
| KE 1200 with cooling table under, Clappers, Sliding Doors | V1-030103-0002 | |
| KE 1600 with cooling table under, Clappers, Sliding Doors | V1-030103-0003 | |

| Model | Order number | Price |
|--|----------------|-------|
| KE 880 with cooling table under, Sliding Doors, Sliding Doors | V1-030103-0007 | |
| KE 1200 with cooling table under, Sliding Doors, Sliding Doors | V1-030103-0008 | |
| KE 1600 with cooling table under, Sliding Doors, Sliding Doors | V1-030103-0009 | |

| Model | Order number | Price |
|---|----------------|-------|
| KE 880 with cooling table under, Sliding Doors, Closed (glass) | V1-030103-0013 | |
| KE 1200 with cooling table under, Sliding Doors, Closed (glass) | V1-030103-0014 | |
| KE 1600 with cooling table under, Sliding Doors, Closed (glass) | V1-030103-0015 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| KE 880 with cooling table under, Clappers, Sliding Doors | V1-030103-0004 | |
| KE 1200 with cooling table under, Clappers, Sliding Doors | V1-030103-0005 | |
| KE 1600 with cooling table under, Clappers, Sliding Doors | V1-030103-0006 | |

| Model | Order number | Price |
|--|----------------|-------|
| KE 880 with cooling table under, Sliding Doors, Sliding Doors | V1-030103-0010 | |
| KE 1200 with cooling table under, Sliding Doors, Sliding Doors | V1-030103-0011 | |
| KE 1600 with cooling table under, Sliding Doors, Sliding Doors | V1-030103-0012 | |

| Model | Order number | Price |
|---|----------------|-------|
| KE 880 with cooling table under, Sliding Doors, Closed (glass) | V1-030103-0016 | |
| KE 1200 with cooling table under, Sliding Doors, Closed (glass) | V1-030103-0017 | |
| KE 1600 with cooling table under, Sliding Doors, Closed (glass) | V1-030103-0018 | |


* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About


Showcases Hangee are designed for ceiling placement with adjustable height. Refrigerated showcase ensure a great conditions for storing food and also helps eliminate the food getting out of their quality and freshness. Glass from each side of the showcase - designed for an ideal visual offer of goods, but only accessible from one side. Suitable for restaurants or canteens.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life. You can choose to light up a showcase or not. Gastro offers a lockable or non-lockable version of these showcases.

Technical drawing

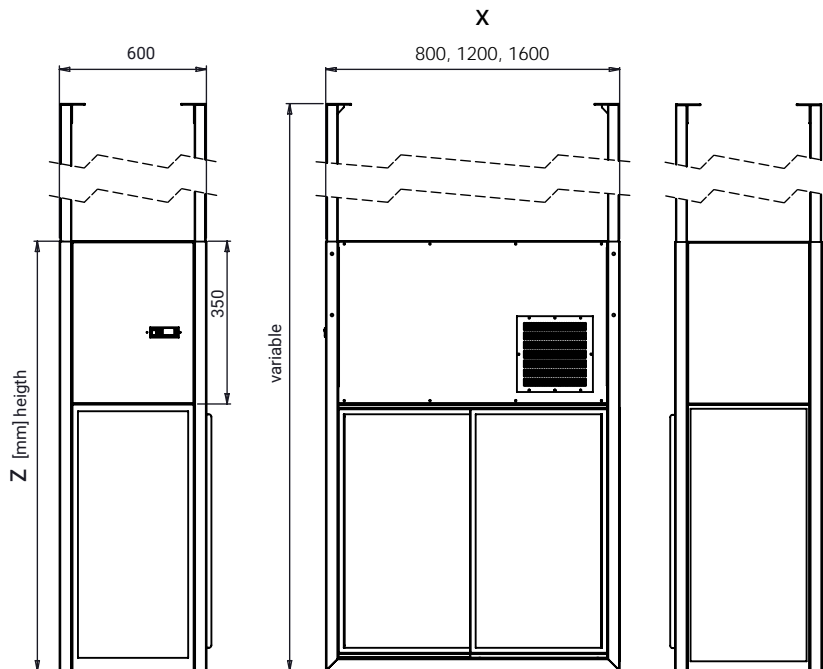

Illustrative pictures



Specification list

| | 800 | 1200 | 1600 |
|--|-----------------|-----------------------|-------|
| Outside dimension: | | | |
| Width (x) [mm] | 800 | 1200 | 1600 |
| Depth (y) [mm] | | 600 | |
| Height (z) [mm] | | 1740 | |
| Temperature | | +4°C ~ +8°C | |
| Cooling medium | | R290 | |
| Refr. capacity (evap. @ -10°C) | 0,7kW | 0,9kW | 1,1kW |
| Voltage | | 1, N, PE ~ 230V, 50Hz | |
| Power input | 0,85kW | 1kW | 1,6kW |
| Current draw | 4,7A | 5,6A | 4,8A |
| Central cooled Power input / Current draw | ~ 0,09kW / ~ 2A | | |

| Accessories | Order number | Price |
|--|--------------|-------|
| LED white | 97-757 | |
| LED white - variable intensity, remote control | 97-681 | |
| Painting | | |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Hangee 800, Sliding Doors, Solid glass | V1-030106-0001 | |
| Hangee 1200, Sliding Doors, Solid glass | V1-030106-0002 | |
| Hangee 1600, Sliding Doors, Solid glass | V1-030106-0003 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| Hangee 800, Sliding Doors, Solid glass | V1-030106-0004 | |
| Hangee 1200, Sliding Doors, Solid glass | V1-030106-0005 | |
| Hangee 1600, Sliding Doors, Solid glass | V1-030106-0006 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

Free-standing showcases on the floor with perforated shelves and mirror finish inside. Refrigerated showcase recreate the ideal conditions of a traditional wine cellar for your wine.

Suitable for wine shops or restaurant, where customers can see the products inside the showcase. The glass door preserving a great visibility to product and making it more attractive thanks to LED lighting.

Thanks to the right setting of temperature and humidity, features of goods will be unchanged at the ideal conditions. Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

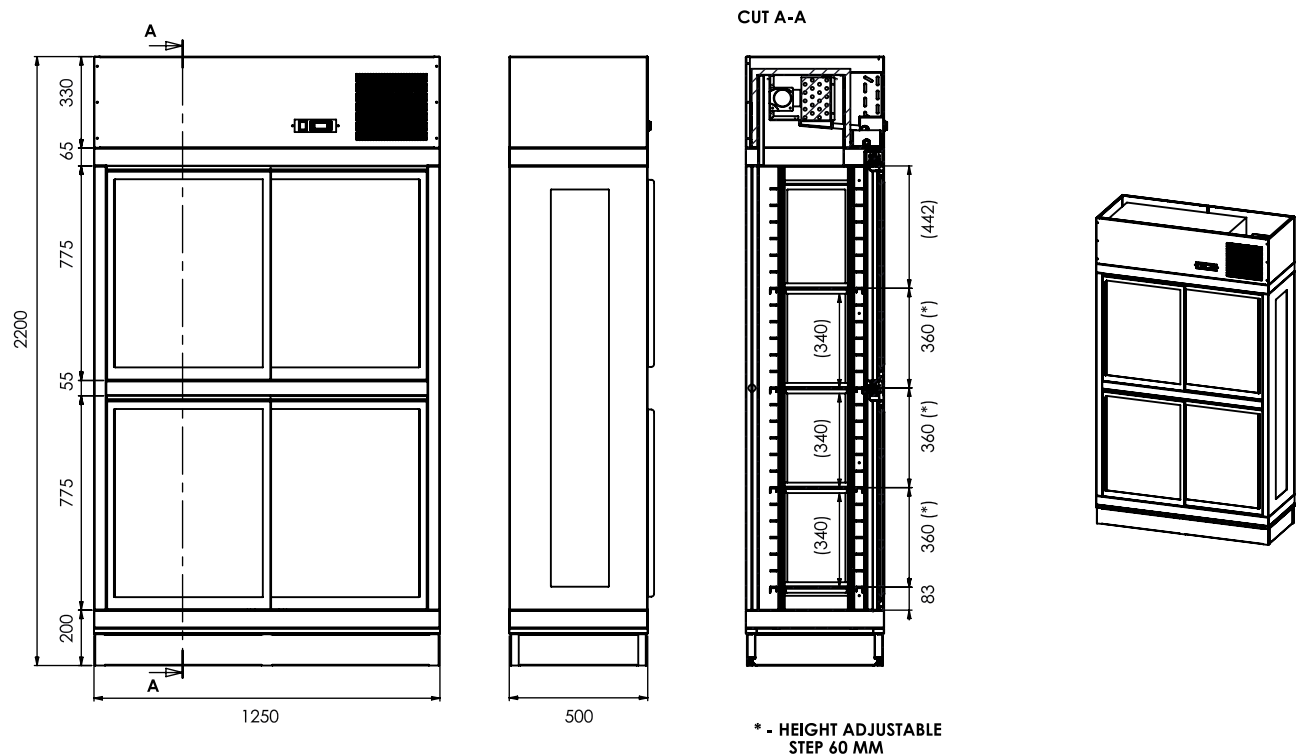

Illustrative pictures

2200



Specification list

| 2200 | |
|--|-----------------------|
| Outside dimension: | |
| Width (x) [mm] | 1250 |
| Depth (y) [mm] | 500 |
| Height (z) [mm] | 2200 |
| Temperature | +4°C ~ +8°C |
| Cooling medium | R290 |
| Refr. capacity (evap. @ -10°C) | 0,65kW |
| Voltage | 1, N, PE ~ 230V, 50Hz |
| Power input | 1,2kW |
| Current draw | 4,87A |
| Central cooled Power input / Current draw | ~ 0,06kW / ~ 2A |

| Accessories | Order number | Price |
|--|--------------|------------|
| LED white | 97-757 | standard |
| LED white - variable intensity, remote control | 97-681 | € 120 / pc |
| Painting RAL 9003 | | on demand |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Showcase Sabrura 2200, 4x perforated shelf, 2x2 sliding doors, mirror finish inside | V1-030110-0001 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| Showcase Sabrura 2200, 4x perforated shelf, 2x2 sliding doors, mirror finish inside | V1-030110-0002 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

Wine showcase recreate the ideal conditions of a traditional wine cellar for your wine. This type of showcase is designed for wine shops, wine presentation or restaurant and many others. Free-standing showcase with aggregate located at the top or at the bottom or central cooled. Variants with two temperature section. The showcase is available with different types of shelves. Super glossy stainless steel inside and brushed stainless

steel outside. The glass door preserving a great visibility to your product and making it more attractive thanks to LED lighting. Thanks to the right setting of temperature and humidity, features of your goods will be unchanged at the ideal conditions. Lockable or non-lockable version.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

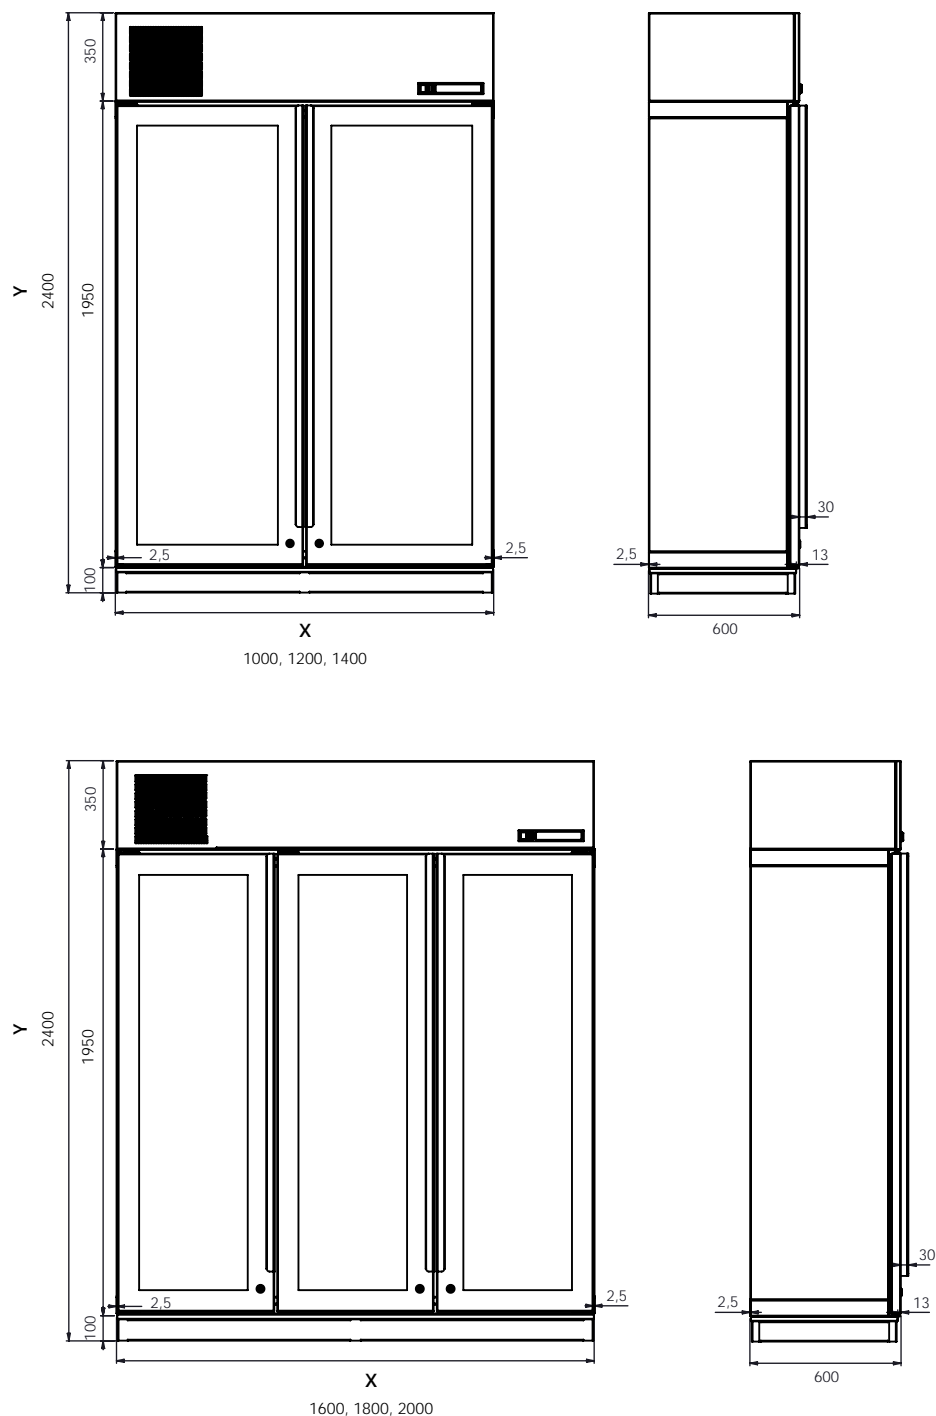

Illustrative pictures



Specification list

| | 800 | 1000 | 1200 | 1400 |
|--|-----------------------|-------|-------|--------|
| Outside dimension: | | | | |
| Width (x) [mm] | 800 | 1000 | 1200 | 1400 |
| Depth (y) [mm] | 600 | | | |
| Height (z) [mm] | 2400 | | | |
| Temperature | +3°C ~ +8°C | | | |
| Cooling medium | R290 | | | |
| Refr. capacity (evap. @ -10°C) | 0,64kW | 1kW | 1kW | 1,2kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | |
| Power input | 0,85kW | 0,9kW | 0,9kW | 1,06kW |
| Current draw | 4,7A | 3,4A | 3,4A | 4,8A |
| Central cooled Power input / Current draw | ~ 0,06kW / ~ 1A | | | |

| | 1600 | 1800 | 2000 |
|--|-----------------------|-------|-------|
| Outside dimension: | | | |
| Width (x) [mm] | 1600 | 1800 | 2000 |
| Depth (y) [mm] | 600 | | |
| Height (z) [mm] | 2400 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 1,2kW | 1,4kW | 1,6kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 1,06kW | 1,2kW | 1,4kW |
| Current draw | 4,8A | 5,6A | 6A |
| Central cooled Power input / Current draw | ~ 0,06kW / ~ 1A | | |

brushed steel outside, super glossy inside,
With aggregate

| Model | Order number | Price |
|-----------------------------------|----------------|-------|
| Wine showcase 800, wing doors | V1-030110-0050 | |
| Wine showcase 1000, wing doors | V1-030110-0051 | |
| Wine showcase 1200, wing doors | V1-030110-0052 | |
| Wine showcase 1400, wing doors | V1-030110-0053 | |
| Wine showcase 1600, wing doors | V1-030110-0054 | |
| Wine showcase 1800, wing doors | V1-030110-0055 | |
| Wine showcase 2000, wing doors | V1-030110-0056 | |

brushed steel outside, super glossy inside,
Central cooled

| Model | Order number | Price |
|-----------------------------------|----------------|-------|
| Wine showcase 800, wing doors | V1-030110-0057 | |
| Wine showcase 1000, wing doors | V1-030110-0058 | |
| Wine showcase 1200, wing doors | V1-030110-0059 | |
| Wine showcase 1400, wing doors | V1-030110-0060 | |
| Wine showcase 1600, wing doors | V1-030110-0061 | |
| Wine showcase 1800, wing doors | V1-030110-0062 | |
| Wine showcase 2000, wing doors | V1-030110-0063 | |

| Accessories | Price |
|---|-------|
| Height adjustable S/S perforated shelf | |
| Height adjustable perforated oak shelf | |
| Removable perforated shelf and pipe for bottle in the angle | |
| Fixed pipe for laying bottles with bottles in the angle and removable perforated shelf on the top for standing bottles | |
| Glass side and back | |
| Steel side and back | |
| Doors from both sides | |
| Standard frame doors | |
| Slim frame doors | |
| Sliding doors | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

Sushi Showcases were developed according to high standard demands. Suitable for supermarkets, restaurant or canteens, where customers can see the products inside.

Refrigerated showcase ensure a great conditions for storing food and also helps eliminate the food getting out of their quality.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

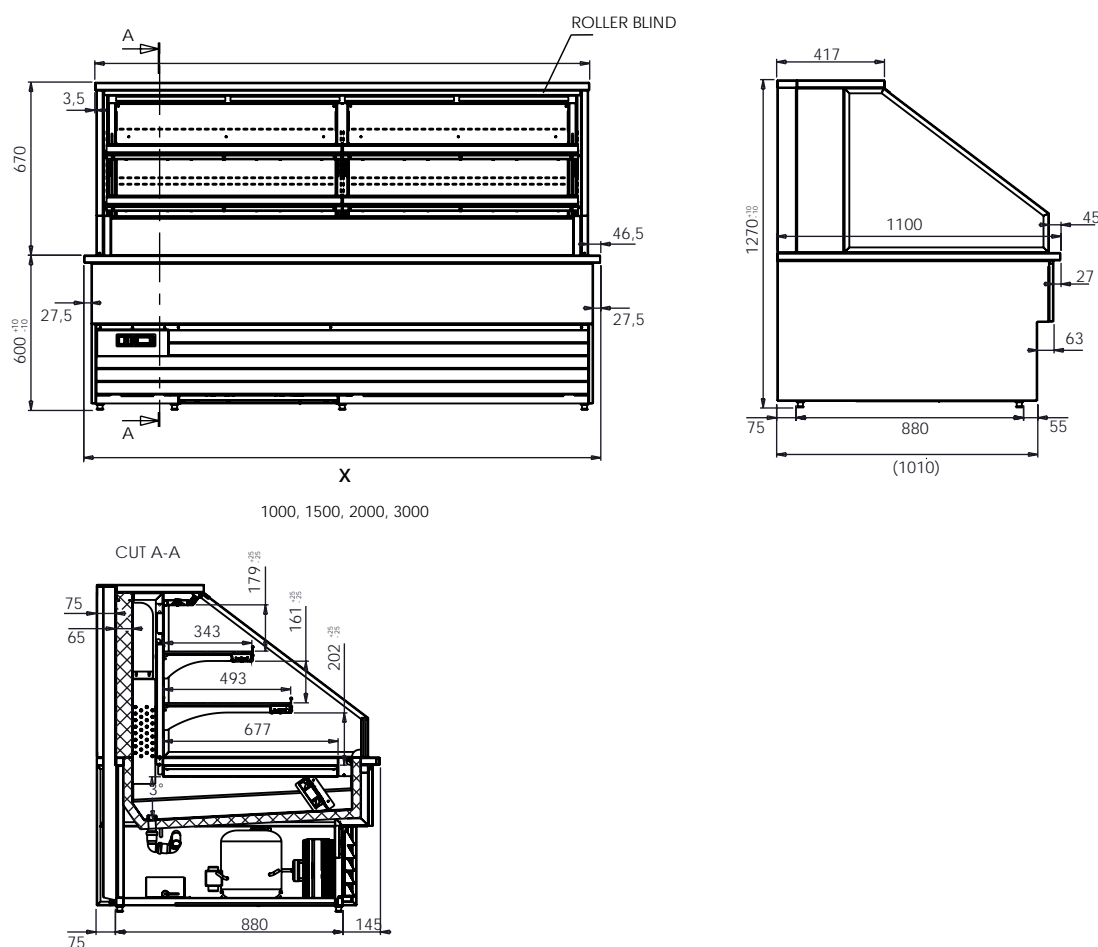

Illustrative pictures

1000

2000

3000



Specification list

| | 1000 | 1500 | 2000 | 3000 |
|--|------------------|-------|--------|-------|
| Dimensions: | | | | |
| Width (x) [mm] | 1000 | 1500 | 2000 | 3000 |
| Depth (y) [mm] | 1100 | 1100 | 1100 | 1100 |
| Height (z) [mm] | 1270 | 1270 | 1270 | 1270 |
| SPL (distance 1m) | 62 dB(A) | | | |
| Temperature | 0°C ~ +6°C | | | |
| Cooling medium | R290 | | | |
| Refr. capacity (evap. @ -10°C) | 1kW | 1,6kW | 2,3kW | 3kW |
| Voltage | 230V / 50Hz | | | |
| Power input | 0,9kW | 1,4kW | 1,37kW | 2,8kW |
| Current draw | 4A | 6A | 6,8A | 8A |
| Central cooled Power input / Current draw | ~ 1,6kW / ~ 2,7A | | | |

| Model | Order number | Price |
|---|----------------|-------|
| Suchi showcase 1000, bottom part in RAL | V1-030113-0005 | |
| Sushi showcase 1500, bottom part in RAL | V1-030113-0006 | |
| Sushi showcase 2000, bottom part in RAL | V1-030113-0001 | |
| Sushi showcase 3000, bottom part in RAL | V1-030113-0002 | |

PREMIUM VERSION

- Lighting Hera-Eco-Tape 4000K
- Protective U-profile
- Shelf can be tilted
- RAL color inside

| | 2000 | 3000 |
|--------------------------------|-------------|-------|
| Dimensions: | | |
| Width (x) [mm] | 2000 | 3000 |
| Depth (y) [mm] | 1100 | 1100 |
| Height (z) [mm] | 1180 | 1180 |
| SPL (distance 1m) | 62 dB(A) | |
| Temperature | 0°C ~ +6°C | |
| Cooling medium | R449A | |
| Refr. capacity (evap. @ -10°C) | 2,3kW | 3kW |
| Voltage | 230V / 50Hz | |
| Power input | 2,1kW | 2,8kW |
| Central cooled | 2,3kW | 3kW |

| Model | Order number | Price |
|---------------------|----------------|-------|
| Suchi showcase 2000 | V1-030113-0003 | |
| Sushi showcase 1500 | V1-030113-0004 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

SHOWCASE DE

EN - FOR TRAYS (FRAMELESS DESIGN)


About

Showcases DE were developed according to high standard demands for our customers. Refrigerated showcase ensure great conditions for storing food and also help to eliminate the food getting out of their quality. Glass from each side of the showcase - designed to display objects through each side.

Suitable for shops or canteens, where customers can see the products inside the showcase.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

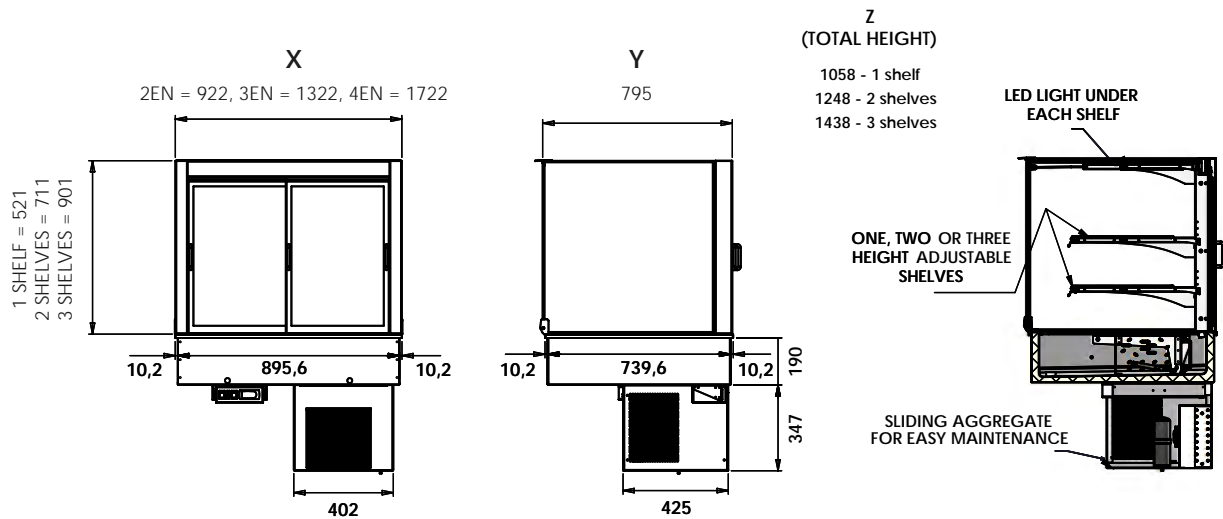

Illustrative pictures

1 shelf

2 shelves

3 shelves



Specification list

| | 2EN | | | 3EN | | | 4EN | | |
|--|-----------------------|-----|-----|-------|-----|-----|-------|-----|-----|
| Number of Shelves | 1x | 2x | 3x | 1x | 2x | 3x | 1x | 2x | 3x |
| Outside dimension: | | | | | | | | | |
| Width (x) [mm] | 922 | | | 1322 | | | 1722 | | |
| Depth (y) [mm] | 795 | | | 795 | | | 795 | | |
| Height (z) [mm] (above the top plate) | 521 | 711 | 901 | 521 | 711 | 901 | 521 | 711 | 901 |
| Installation dimension: | | | | | | | | | |
| Width (x) [mm] | 909 | | | 1309 | | | 1709 | | |
| Depth (y) [mm] | 779 | | | | | | | | |
| Temperature | +3°C ~ +8°C | | | | | | | | |
| Cooling medium | R290 | | | | | | | | |
| Refr. capacity (evap. @ -10°C) | 0,9kW | | | 1kW | | | 1,2kW | | |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | | | | | | |
| Power input | 1kW | | | 1,2kW | | | 1,2kW | | |
| Current draw | 5,6A | | | 6A | | | 6A | | |
| Central cooled Power input / Current draw | ~ 0,1kW / ~ 1,25A | | | | | | | | |

| Accessories | Order number | Price |
|--|--------------|-------|
| Doors with soft close | | |
| Electric evaporating tray | | |
| „U„ air flow system, possible to put showcase to the wall | | |
| Cover for „U“ air flow system | | |
| Lock | | |
| Painting | | |

Showcase DE - EN for trays, 1 shelf

with aggregate

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for trays - 2EN 1x shelves, wing doors | V1-030114-0091 | |
| Showcase DE for trays - 3EN 1x shelves, sliding doors | V1-030114-0092 | |
| Showcase DE for trays - 4EN 1x shelves, sliding doors | V1-030114-0093 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| Showcase DE for trays - 2EN 1x shelves , wing doors | V1-030114-0094 | |
| Showcase DE for trays - 3EN 1x shelves , sliding doors | V1-030114-0095 | |
| Showcase DE for trays - 4EN 1x shelves , sliding doors | V1-030114-0096 | |

Showcase DE- EN for trays, 2 shelves

with aggregate

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for trays - 2EN 2x shelves, wing doors | V1-030114-0097 | |
| Showcase DE for trays - 3EN 2x shelves, sliding doors | V1-030114-0098 | |
| Showcase DE for trays - 4EN 2x shelves, sliding doors | V1-030114-0099 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| Showcase DE for trays - 2EN 2x shelves , wing doors | V1-030114-0100 | |
| Showcase DE for trays - 3EN 2x shelves , sliding doors | V1-030114-0101 | |
| Showcase DE for trays - 4EN 2x shelves , sliding doors | V1-030114-0102 | |

Showcase DE- EN for trays, 3 shelves

with aggregate

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for trays - 2EN 3x shelves, wing doors | V1-030114-0103 | |
| Showcase DE for trays - 3EN 3x shelves, sliding doors | V1-030114-0104 | |
| Showcase DE for trays - 4EN 3x shelves, sliding doors | V1-030114-0105 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| Showcase DE for trays - 2EN 3x shelves , wing doors | V1-030114-0106 | |
| Showcase DE for trays - 3EN 3x shelves , sliding doors | V1-030114-0107 | |
| Showcase DE for trays - 4EN 3x shelves , sliding doors | V1-030114-0108 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

SHOWCASE DE GN - FOR TUBS (FRAMELESS DESIGN)


About

Showcases DE were developed according to high standard demands for our customers. Refrigerated showcase ensure great conditions for storing food and also help to eliminate the food getting out of their quality. Glass from each side of the showcase - designed to display objects through each side.

Suitable for shops or canteens, where customers can see the products inside the showcase.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

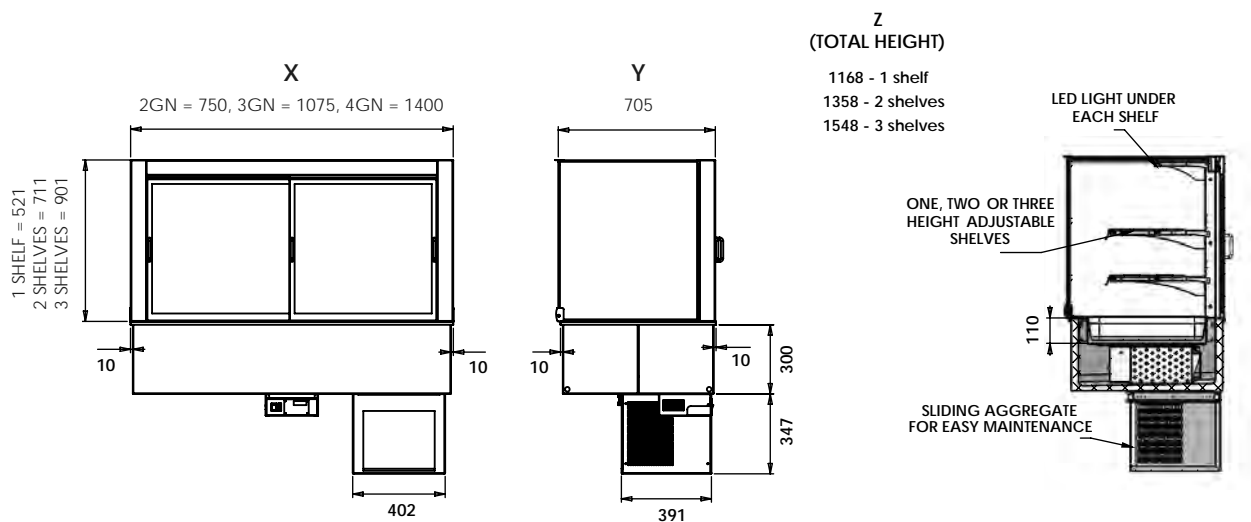

Illustrative pictures

1 shelf

2 shelves

3 shelves



Specification list

| | 2GN | | | 3GN | | | 4GN | | |
|--|-----------------------|-----|-----|--------|-----|-----|-------|-----|-----|
| Number of Shelves | 1x | 2x | 3x | 1x | 2x | 3x | 1x | 2x | 3x |
| Outside dimension: | | | | | | | | | |
| Width (x) [mm] | 750 | | | 1075 | | | 1400 | | |
| Depth (y) [mm] | 705 | | | | | | | | |
| Height (z) [mm] (above the top plate) | 521 | 711 | 901 | 521 | 711 | 901 | 521 | 711 | 901 |
| Installation dimension: | | | | | | | | | |
| Width (x) [mm] | 737 | | | 1062 | | | 1387 | | |
| Depth (y) [mm] | 689 | | | | | | | | |
| Temperature | +3°C ~ +8°C | | | | | | | | |
| Cooling medium | R290 | | | | | | | | |
| Refr. capacity (evap. @ -10°C) | 0,9kW | | | 1kW | | | 1,2kW | | |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | | | | | | |
| Power input | 0,67kW | | | 0,67kW | | | 1kW | | |
| Current draw | 4,7A | | | 4,7A | | | 5,6A | | |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,75A | | | | | | | | |

| Accessories | Order number | Price |
|--|--------------|-------|
| Doors with soft close | | |
| Electric evaporating tray | | |
| „U„ air flow system, possible to put showcase to the wall | | |
| Cover for „U“ air flow system | | |
| Lock | | |
| Painting | | |

| Showcase DE - GN for tubs, 1 shelf

Showcase DE - GN for trays, with aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Showcase DE for tubs - 2GN 1x shelves, wing doors | V1-030114-0127 | |
| Showcase DE for tubs - 3GN 1x shelves, sliding doors | V1-030114-0128 | |
| Showcase DE for tubs - 4GN 1x shelves, sliding doors | V1-030114-0129 | |

Showcase DE - GN for trays

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for tubs - 2GN 1x shelves , wing doors | V1-030114-0130 | |
| Showcase DE for tubs - 3GN 1x shelves , sliding doors | V1-030114-0131 | |
| Showcase DE for tubs - 4GN 1x shelves , sliding doors | V1-030114-0132 | |

| Showcase DE- GN for tubs, 2 shelves

Showcase DE - GN for tubs, with aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Showcase DE for tubs - 2GN 2x shelves, wing doors | V1-030114-0133 | |
| Showcase DE for tubs - 3GN 2x shelves, sliding doors | V1-030114-0134 | |
| Showcase DE for tubs - 4GN 2x shelves, sliding doors | V1-030114-0135 | |

Showcase DE - GN for tubs

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for tubs - 2GN 2x shelves , wing doors | V1-030114-0136 | |
| Showcase DE for tubs - 3GN 2x shelves , sliding doors | V1-030114-0137 | |
| Showcase DE for tubs - 4GN 2x shelves , sliding doors | V1-030114-0138 | |

| Showcase DE- GN for tubs, 3 shelves

Showcase DE - GN for tubs, with aggregate

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for tubs - 2GN 3x shelves, aggregatem, wing doors | V1-030114-0139 | |
| Showcase DE for tubs - 3GN 3x shelves, sliding doors | V1-030114-0140 | |
| Showcase DE for tubs - 4GN 3x shelves, sliding doors | V1-030114-0141 | |

Showcase DE - GN for tubs

| Model | Order number | Price |
|--|----------------|-------|
| Showcase DE for tubs - 2GN 3x shelves , wing doors | V1-030114-0142 | |
| Showcase DE for tubs - 3GN 3x shelves , sliding doors | V1-030114-0143 | |
| Showcase DE for tubs - 4GN 3x shelves , sliding doors | V1-030114-0144 | |


* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About

This showcase is designed for storing and visually presenting cakes and other desserts. It is intended to be built into a tabletop. Thanks to a smart mechanism, the hinged doors open easily, allowing you to slide out the shelf with the products toward you, providing ample space for handling them. The front glass is equipped with a stainless steel safety chain to prevent tipping and

can be removed for complete maintenance of the unit. Ideal for restaurants, cafés, hotels, hospitals, and other food service establishments. Made of stainless steel, ensuring easy cleaning and long-lasting durability. Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

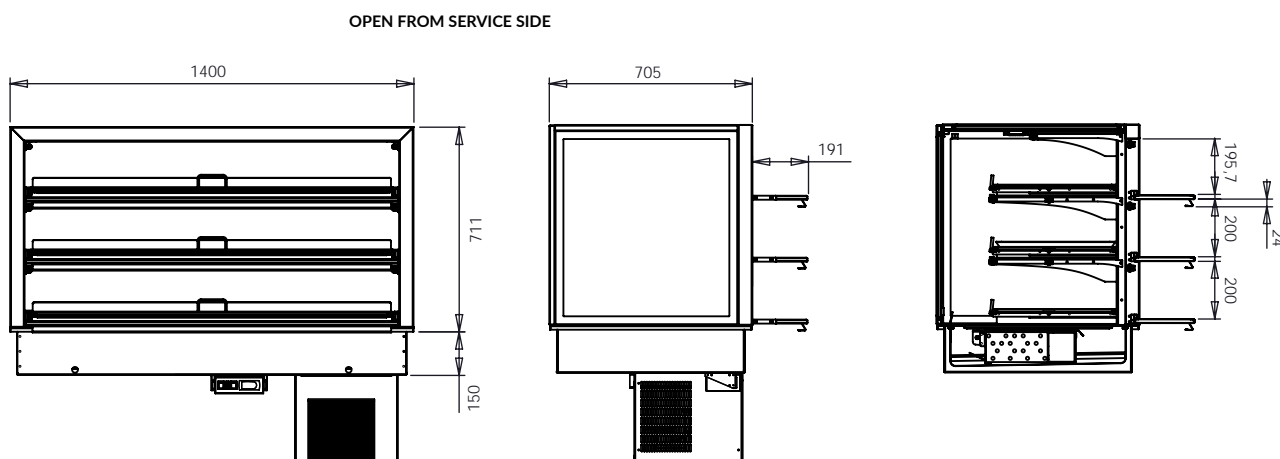


Specification list

| | |
|--|-----------------------|
| Outside dimension: | |
| Width (x) [mm] | 1400 |
| Depth (y) [mm] | 705 |
| Height (z) [mm] (above the top plate) | 711 |
| Temperature | +4°C ~ +8°C |
| Cooling medium | R290 |
| Refr. capacity (evap. @ -10°C) | 1kW |
| Voltage | 1, N, PE ~ 230V, 50Hz |
| Power input | 1,2kW |
| Current draw | 6A |
| Central cooled Power input / Current draw | ~ 0,12kW / ~ 1A |

| Model | Order number | Price |
|------------------------------------|----------------|-------|
| Showcase for cakes, with aggregate | V1-030114-0200 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

Technical drawing

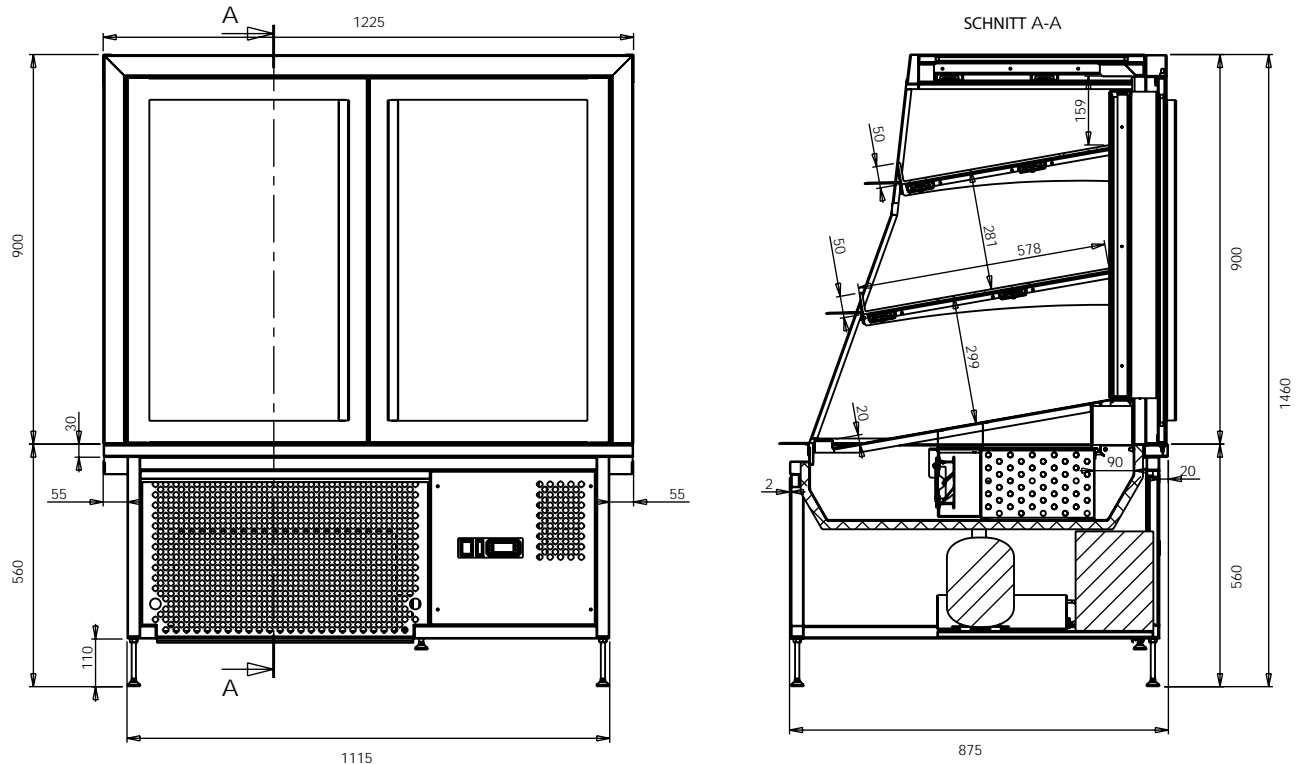

Specification list



Outside dimension:

| | |
|--|-----------------------|
| Width (x) [mm] | 1225 |
| Depth (y) [mm] | 875 |
| Height (z) [mm] | 1460 |
| Temperature | +4°C ~ +8°C |
| Cooling medium | R290 |
| Refr. capacity (evap. @ -10°C) | 1kW |
| Voltage | 1, N, PE ~ 230V, 50Hz |
| Power input | 1,2kW |
| Current draw | 6A |
| Central cooled Power input / Current draw | ~ 0,12kW / ~ 1A |

| Model | Order number | Price |
|--------------------------|----------------|-------|
| Showcase Edeka, RAL 9005 | V1-030115-0003 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

Technical drawing

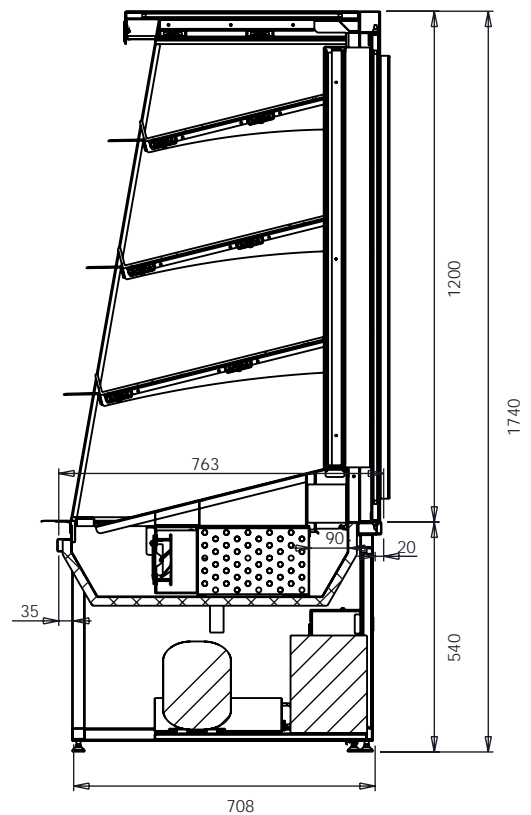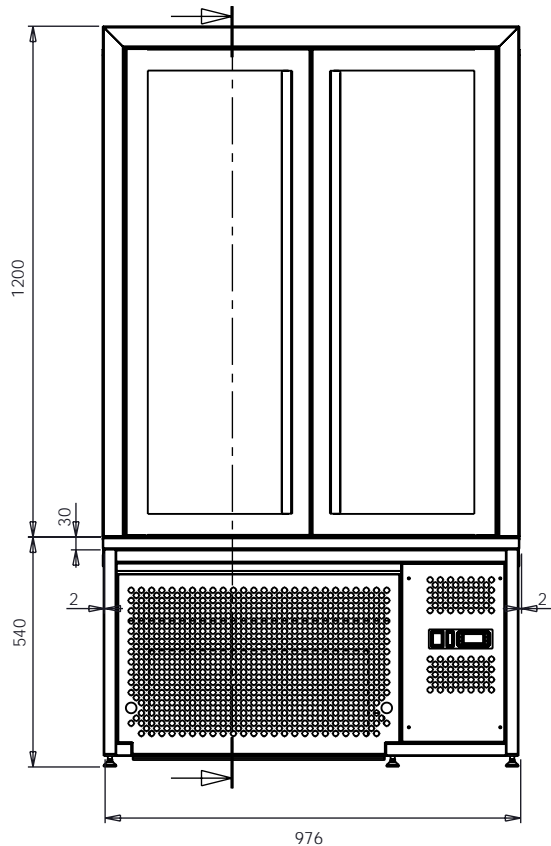

Specification list

Outside dimension:

| | |
|--|-----------------------|
| Width (x) [mm] | 976 |
| Depth (y) [mm] | 708 |
| Height (z) [mm] | 1740 |
| Temperature | +4°C ~ +8°C |
| Cooling medium | R290 |
| Refr. capacity (evap. @ -10°C) | 1kW |
| Voltage | 1, N, PE ~ 230V, 50Hz |
| Power input | 1,1kW |
| Current draw | 5,8A |
| Central cooled Power input / Current draw | ~ 0,12kW / ~ 1A |

| Model | Order number | Price |
|--------------------------------|----------------|-------|
| Showcase Netto Edeka, RAL 9005 | V1-030115-0004 | |


* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About

This type of cooling box is ideally designed for storing KEG barrels at cold and constant temperatures. They can be used to cool beer and soft drinks. Wing doors allow you easy access and handling of goods.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

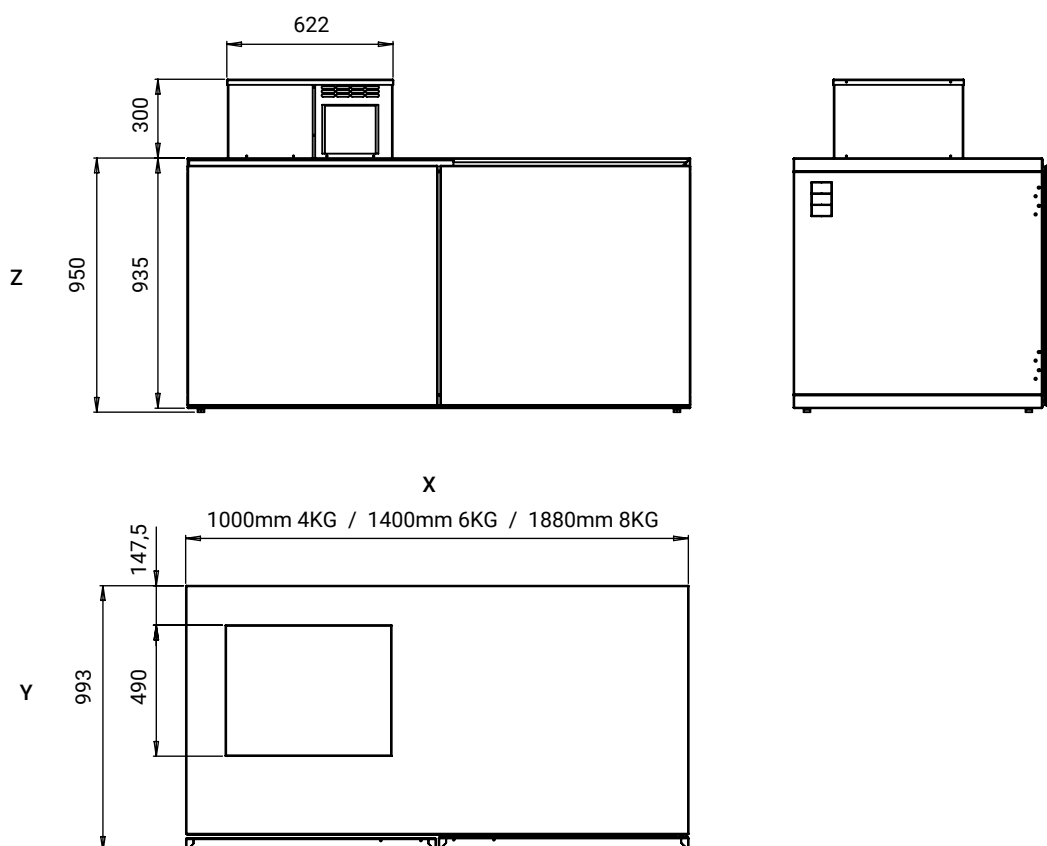

Illustrative pictures

4KEG

6KEG

8KEG



Specification list

| | 4KEG | 6KEG | 8KEG |
|--|-----------------------|--------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 1000 | 1400 | 1880 |
| Depth (y) [mm] | 993 | | |
| Height (z) [mm] | 950 + 300 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,35kW | 0,35kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,24kW | 0,24kW | 0,24kW |
| Current draw | 1,6A | 1,6A | 1,7A |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,25A | | |

With aggregate

| Model | Order number | Price |
|----------------------------|----------------|-------|
| Cooling box for kegs, 4KEG | V1-030200-0001 | |
| Cooling box for kegs, 6KEG | V1-030200-0002 | |
| Cooling box for kegs, 8KEG | V1-030200-0003 | |

Central cooled

| Model | Order number | Price |
|----------------------------|----------------|-------|
| Cooling box for kegs, 4KEG | V1-030200-0004 | |
| Cooling box for kegs, 6KEG | V1-030200-0005 | |
| Cooling box for kegs, 8KEG | V1-030200-0006 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

Cooling bottle box is designed for cooling beverages with bottle height of up to 225mm. Cooling box can be built-in or free standing. The glass front allows a clear view of the bottles.


Thanks to the ribbed and sloping bottom of the tub, easy handling of beverages is possible. Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing


COOLING BOTTLE BOX 780 WITH CONTROL PANEL

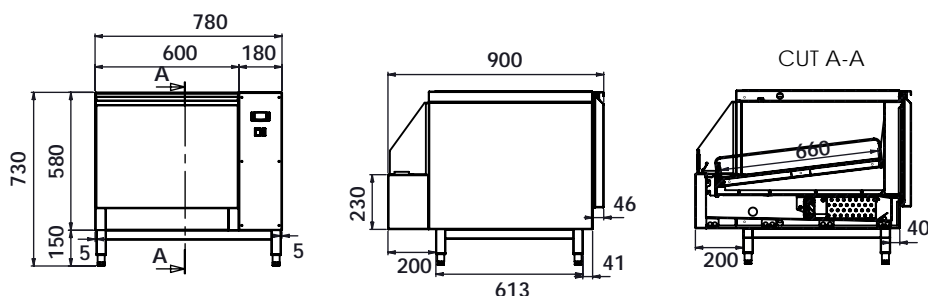


COOLING BOTTLE BOX 1080 WITH CONTROL PANEL

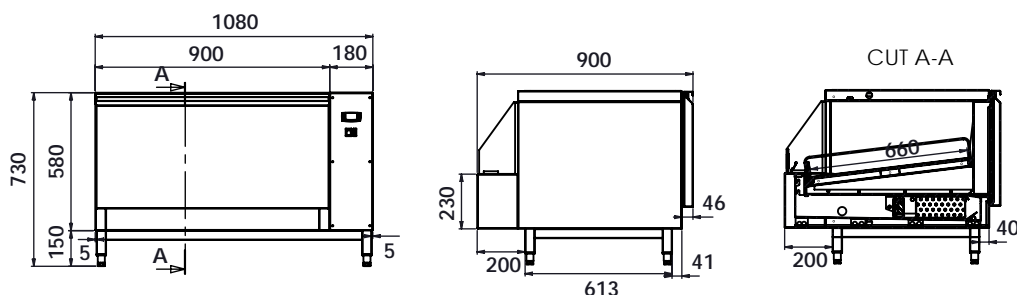

COOLING BOTTLE BOX 1380 WITH CONTROL PANEL

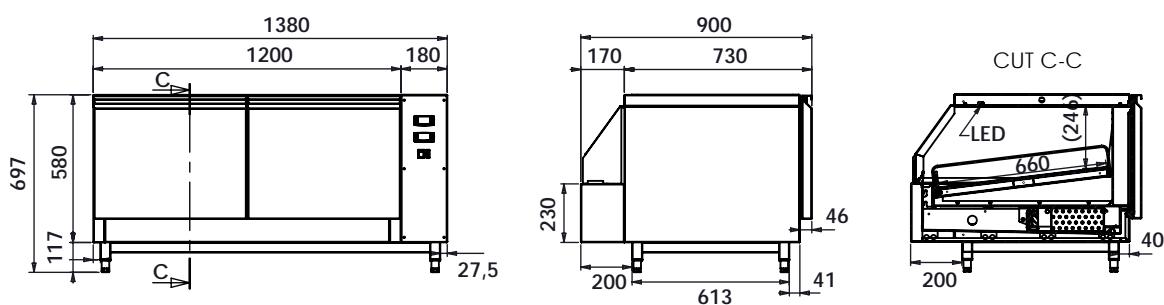

COOLING BOTTLE BOX 780 WITH AGGREGATE

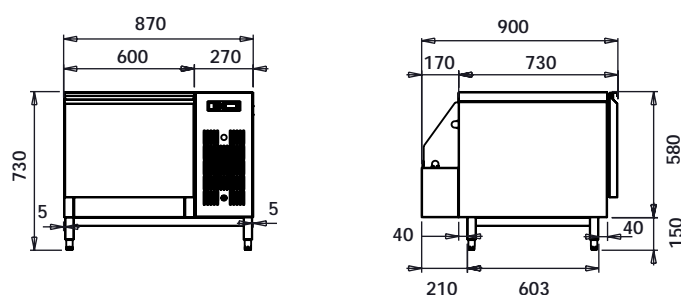

AGGREGATE - 270MM
CONTROL PANEL - 180MM

Illustrative pictures

780

1080

1380



Specification list

| | 780 | 1080 | 1380 |
|---|-----------------------|-------------|-------------|
| Outside dimension: | | | |
| Width (x) [mm] Aggregate Control panel | 870 780 | 1170 1080 | 1470 1380 |
| Depth (y) [mm] | 900 | | |
| Height (z) [mm] | 730 | 730 | 697 |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,43kW | 0,65kW | 0,85kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,3kW | 0,5kW | 0,7kW |
| Central cooled | 0,43kW | 0,65kW | 0,85kW |

With aggregate

| Model | Order number | Price |
|-------------------------|----------------|-------|
| Cooling bottle box 780 | V1-030202-0001 | |
| Cooling bottle box 1080 | V1-030202-0002 | |
| Cooling bottle box 1380 | V1-030202-0003 | |

Central cooled

| Model | Order number | Price |
|-------------------------|----------------|-------|
| Cooling bottle box 780 | V1-030202-0004 | |
| Cooling bottle box 1080 | V1-030202-0005 | |
| Cooling bottle box 1380 | V1-030202-0006 | |


* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About

Cooling plates keep food or beverage at a safe cold temperature (even for longer period) to make the dishes the most delicious at the time of serving. Suitable for almost every kitchen or canteens. Various dimension widths: for optimum usage of space.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

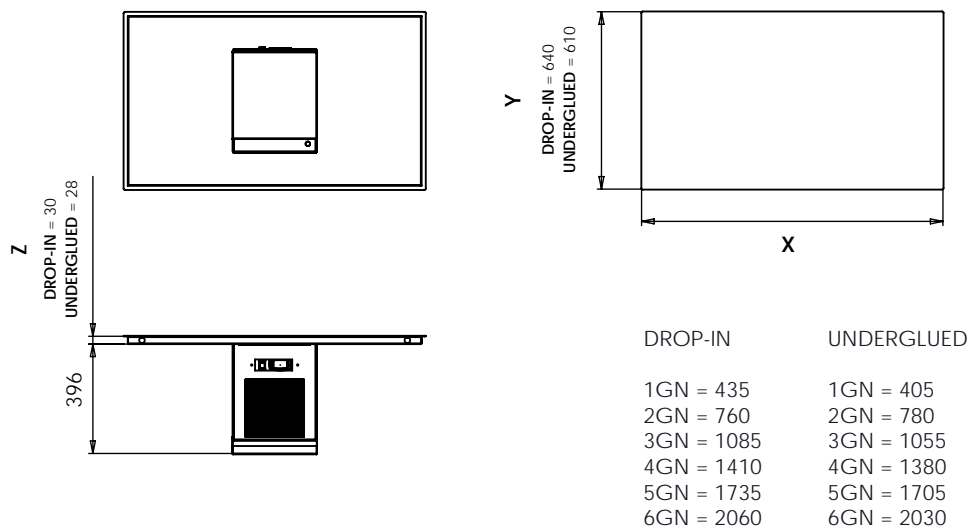

DROP-IN
(LAMINATE TOP PLATE)



UNDERGLUED
(STONE & S/S TOP PLATE)



UNDERGLUED-DEMOUNTABLE
(STONE & S/S TOP PLATE)

Illustrative pictures

1GN

2GN

3GN

4GN

5GN

6GN



Specification list

| | 1GN | 2GN | 3GN |
|---|-----------------------|-----------|-------------|
| Outside dimension: | | | |
| Width (x) [mm] Drop-in I Underglued | 435 I 405 | 760 I 730 | 1085 I 1055 |
| Depth (y) [mm] Drop-in I Underglued | 640 I 610 | | |
| Height (z) [mm] Drop-in I Underglued | 28 +396 I 30 +396 | | |
| Installation dimension: | | | |
| Width (x) [mm] x Depth (y) [mm] Drop-in I Underglued | 410 x 615 | 735 x 615 | 1060 x 615 |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R600 | | |
| Refr. capacity (evap. @ -10°C) | 0,14kW | 0,17kW | 0,28kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,18kW | 0,19kW | 0,2kW |
| Current draw | 1,1A | 1,3A | 1,4A |
| Central cooled Power input / Current draw | ~ 0,03kW / ~ 0,25A | | |

| | 4GN | 5GN | 6GN |
|---|-----------------------|-------------|-------------|
| Outside dimension: | | | |
| Width (x) [mm] Drop-in I Underglued | 1410 I 1380 | 1735 I 1705 | 2060 I 2030 |
| Depth (y) [mm] Drop-in I Underglued | 640 I 610 | | |
| Height (z) [mm] Drop-in I Underglued | 28 +396 I 30 +396 | | |
| Installation dimension: | | | |
| Width (x) [mm] x Depth (y) [mm] Drop-in I Underglued | 1385 x 615 | 1710 x 615 | 2035 x 615 |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,35kW | 0,35kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,22kW | 0,24kW | 0,24kW |
| Current draw | 1,4A | 1,6A | 1,6A |
| Central cooled Power input / Current draw | ~ 0,03kW / ~ 0,25A | | |

With aggregate

| Model | Order number | Price |
|--|----------------|-------|
| Cooling plate underglued 1GN | V1-030300-0001 | |
| Cooling plate underglued 2GN | V1-030300-0002 | |
| Cooling plate underglued 3GN | V1-030300-0003 | |
| Cooling plate underglued 4GN | V1-030300-0004 | |
| Cooling plate underglued 5GN | V1-030300-0005 | |
| Cooling plate underglued 6GN | V1-030300-0006 | |
| | | |
| Cooling plate drop-in 1GN | V1-030300-0013 | |
| Cooling plate drop-in 2GN | V1-030300-0014 | |
| Cooling plate drop-in 3GN | V1-030300-0015 | |
| Cooling plate drop-in 4GN | V1-030300-0016 | |
| Cooling plate drop-in 5GN | V1-030300-0017 | |
| Cooling plate drop-in 6GN | V1-030300-0018 | |
| | | |
| Cooling plate underglued-demountable , 1GN | V1-030300-0025 | |
| Cooling plate underglued-demountable , 2GN | V1-030300-0026 | |
| Cooling plate underglued-demountable , 3GN | V1-030300-0027 | |
| Cooling plate underglued-demountable , 4GN | V1-030300-0028 | |
| Cooling plate underglued-demountable , 5GN | V1-030300-0029 | |
| Cooling plate underglued-demountable , 6GN | V1-030300-0030 | |

Central cooled

| Model | Order number | Price |
|--|----------------|-------|
| Cooling plate underglued 1GN | V1-030300-0007 | |
| Cooling plate underglued 2GN | V1-030300-0008 | |
| Cooling plate underglued 3GN | V1-030300-0009 | |
| Cooling plate underglued 4GN | V1-030300-0010 | |
| Cooling plate underglued 5GN | V1-030300-0011 | |
| Cooling plate underglued 6GN | V1-030300-0012 | |
| | | |
| Cooling plate drop-in 1GN | V1-030300-0019 | |
| Cooling plate drop-in 2GN | V1-030300-0020 | |
| Cooling plate drop-in 3GN | V1-030300-0021 | |
| Cooling plate drop-in 4GN | V1-030300-0022 | |
| Cooling plate drop-in 5GN | V1-030300-0023 | |
| Cooling plate drop-in 6GN | V1-030300-0024 | |
| | | |
| Cooling plate underglued-demountable 1GN | V1-030300-0031 | |
| Cooling plate underglued-demountable 2GN | V1-030300-0032 | |
| Cooling plate underglued-demountable 3GN | V1-030300-0033 | |
| Cooling plate underglued-demountable 4GN | V1-030300-0034 | |
| Cooling plate underglued-demountable 5GN | V1-030300-0035 | |
| Cooling plate underglued-demountable 6GN | V1-030300-0036 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


| About

Over ventilated tub is used for the circulating of cooled air to keep all products at the ideal temperature. Thanks to free access to your products, the cooling tub allows easier handling for the service. Suitable for slicing a cake and then easy to pick up. It is suitable for restaurants, fast food, hospitals, canteens and many others.

The tub contains a digital defrosting and digital temperature control. The plate can be folded upwards with evaporator - 37° and locked in the top position.

The evaporator is located directly under the plate. Two positions of the plate - straight and inclined (tilts towards the customer (5°). This function is also suitable for better maintenance and service.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.
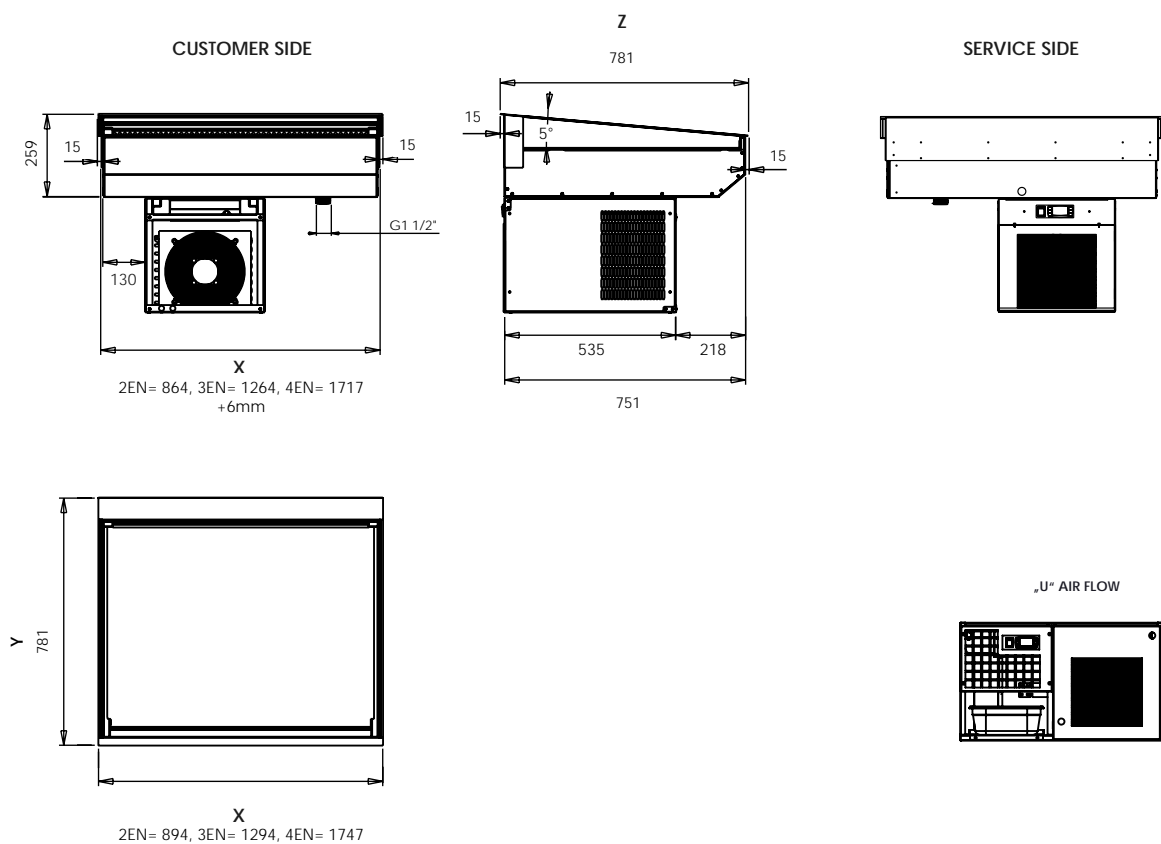
| Technical drawing**| Illustrative pictures****2EN****3EN****4EN****4EN (2+2)**

Specification list

| | 2EN | 3EN | 4EN |
|--|-----------------------|--------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 894 | 1294 | 1747 |
| Depth (y) [mm] | 781 | | |
| Height (z) [mm] | 259 + 360 | | |
| Installation dimension: | | | |
| Width (x) [mm] | 870 | 1270 | 1723 |
| Depth (y) [mm] | 757 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,55kW | 0,64kW | 0,9kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,42kW | 0,6kW | 0,67kW |
| Current draw | 2,8A | 3A | 4,7A |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,75A | | |

With aggregate

| Model | Order number | Price |
|-------------------------|----------------|-------|
| Inclined 5° - 2EN | V3-030400-0197 | |
| Inclined 5° - 3EN | V3-030400-0198 | |
| Inclined 5° - 4EN | V3-030400-0168 | |
| Inclined 5° - 4EN (2+2) | V3-030400-0167 | |

Central cooled

| Model | Order number | Price |
|-------------------------|----------------|-------|
| Inclined 5° - 2EN | V3-030400-0231 | |
| Inclined 5° - 3EN | V3-030400-0232 | |
| Inclined 5° - 4EN | V3-030400-0234 | |
| Inclined 5° - 4EN (2+2) | V3-030400-0233 | |

If you want a larger size of the over ventilated cooling tub beyond these dimensions listed in the table, let us know.

* The evaporation tub is not included as a standard part of the product; it must be specified when placing the order. **Tub type - Non-foamed.**

About


Over ventilated tub is used for the circulating of cooled air to keep all products at the ideal temperature. Thanks to free access to your products, the cooling tub allows easier handling for the service. Suitable for slicing a cake and then easy to pick up. It is suitable for restaurants, fast food, hospitals, canteens and many others.

The tub contains a digital defrosting and digital temperature control. The plate can be folded upwards with evaporator - 37° and locked in the top position.

The evaporator is located directly under the plate. Two positions of the plate - straight and inclined (tilts towards the customer (8°).

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

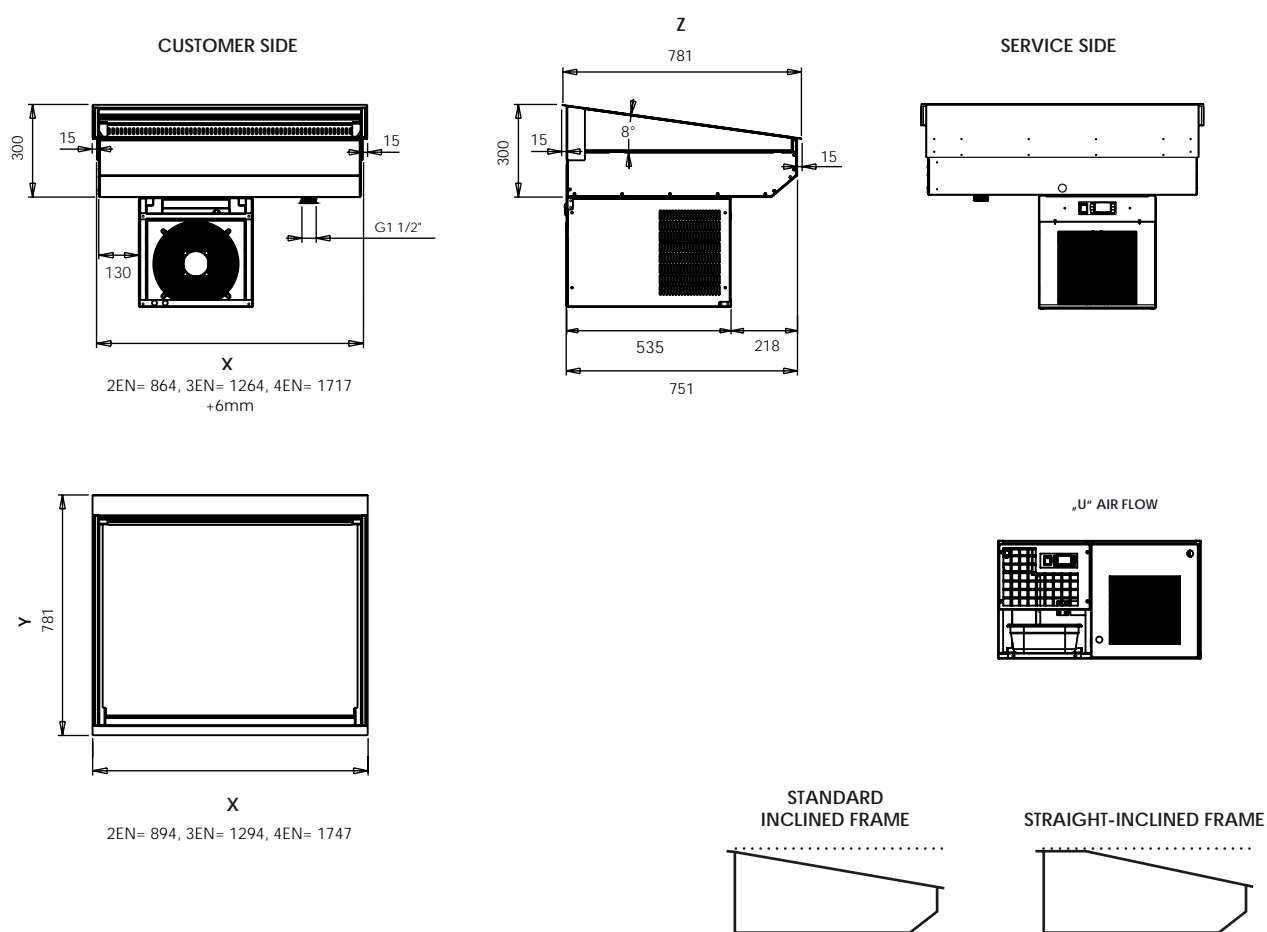

Illustrative pictures

2EN



3EN



4EN



4EN (2+2)



Specification list

| | 2EN | 3EN | 4EN |
|--|-----------------------|--------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 894 | 1294 | 1747 |
| Depth (y) [mm] | 781 | | |
| Height (z) [mm] | 300 + 360 | | |
| Installation dimension: | | | |
| Width (x) [mm] | 870 | 1270 | 1723 |
| Depth (y) [mm] | 757 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,55kW | 0,64kW | 0,9kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,42kW | 0,6kW | 0,67kW |
| Current draw | 2,8A | 3A | 4,7A |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,75A | | |

With aggregate

| Model | Order number | Price |
|-------------------------|----------------|-------|
| Inclined 8° - 2EN | V3-030400-0235 | |
| Inclined 8° - 3EN | V3-030400-0236 | |
| Inclined 8° - 4EN | V3-030400-0166 | |
| Inclined 8° - 4EN (2+2) | V3-030400-0165 | |

Central cooled

| Model | Order number | Price |
|-------------------------|----------------|-------|
| Inclined 8° - 2EN | V3-030400-0241 | |
| Inclined 8° - 3EN | V3-030400-0242 | |
| Inclined 8° - 4EN | V3-030400-0244 | |
| Inclined 8° - 4EN (2+2) | V3-030400-0243 | |

STRAIGHT-INCLINED FRAME

Dimensions:

Width (x) [mm]: 2EN=932, 3EN=1332, 4EN=1732

Depth (y) x Height (z) [mm]: 815 x 282 +361

Installation dimensions:

Width (x) x Depth (y) [mm]: 2EN=901x781, 3EN=1301x781, 4EN=1701x781

With aggregate

| Model | Order number | Price |
|--|----------------|-------|
| Straight-Inclined frame 8° - 2EN | V2-030400-0089 | |
| Straight-Inclined frame 8° - 3EN | V2-030400-0090 | |
| Straight-Inclined frame 8° - 4EN (2+2) | V2-030400-0091 | |

Central cooled

| Model | Order number | Price |
|--|----------------|-------|
| Straight-Inclined frame 8° - 2EN | V2-030400-0096 | |
| Straight-Inclined frame 8° - 3EN | V2-030400-0097 | |
| Straight-Inclined frame 8° - 4EN (2+2) | V2-030400-0098 | |

If you want a larger size of the over ventilated cooling tub beyond these dimensions listed in the table, let us know.

* The evaporation tub is not included as a standard part of the product; it must be specified when placing the order. **Tub type - Non-foamed.**


About

Over ventilated tub is used for the circulating of cooled air to keep all products at the ideal temperature. Thanks to free access to your products, the cooling tub allows easier handling for the service. Suitable for slicing a cake and then easy to pick up. It is suitable for restaurants, fast food, hospitals, canteens and many others. The tub contains a digital defrosting and digital temperature control.

The plate can be folded upwards with evaporator - 38° and locked in the top position. The evaporator is located directly under the plate.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

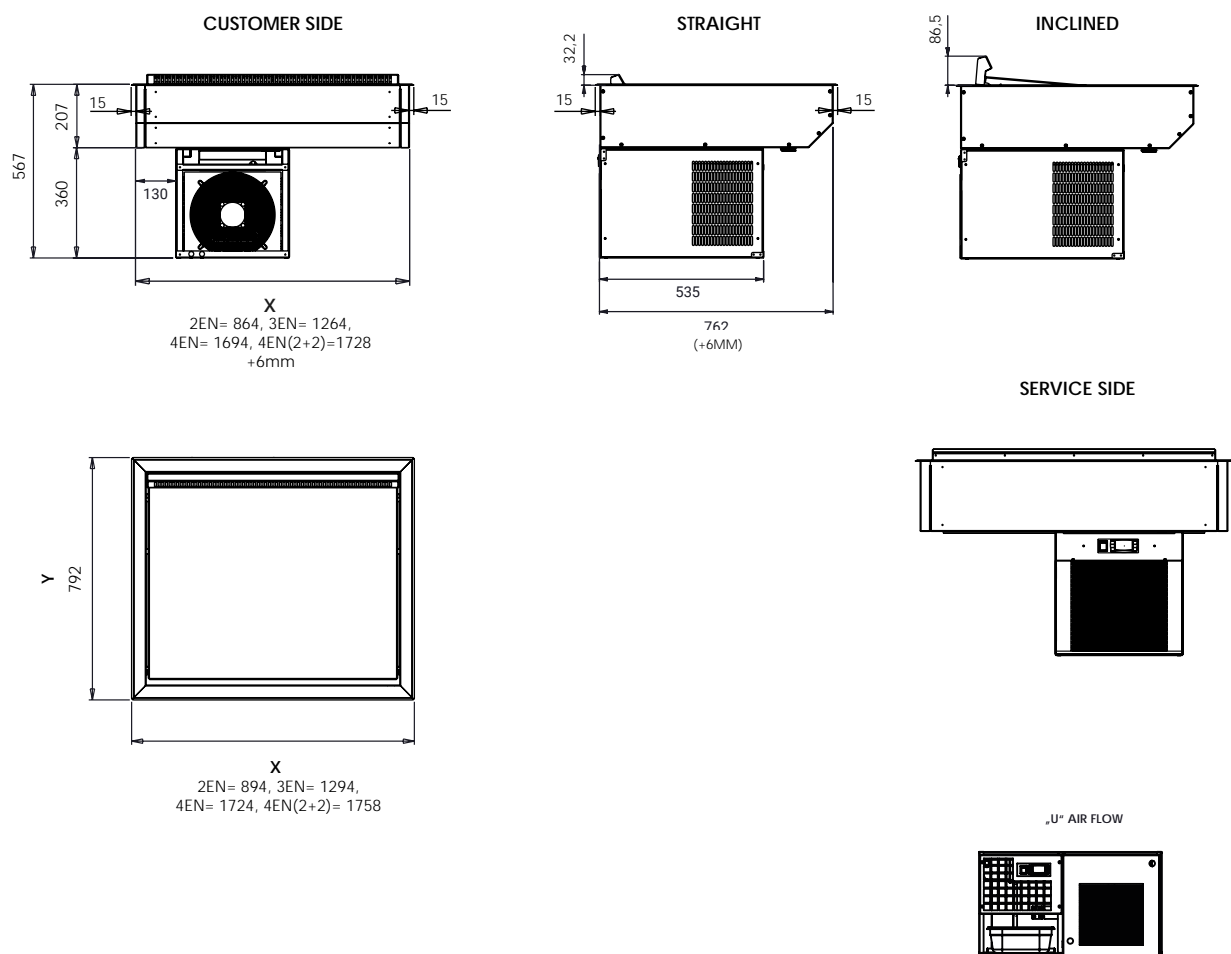

Illustrative pictures

2EN



3EN



4EN



4EN (2+2)



Specification list

| | 2EN | 3EN | 4EN / 4EN (2+2) |
|--|--------|-----------------------|-----------------|
| Outside dimension: | | | |
| Width (x) [mm] | 894 | 1294 | 1724 / 1758 |
| Depth (y) [mm] | | 792 | |
| Height (z) [mm] | | 207 + 360 | |
| Installation dimension: | | | |
| Width (x) [mm] | 870 | 1270 | 1700 / 1728 |
| Depth (y) [mm] | | 768 | |
| Temperature | | +3°C ~ +8°C | |
| Cooling medium | | R290 | |
| Refr. capacity (evap. @ -10°C) | 0,48kW | 0,64kW | 0,85kW |
| Voltage | | 1, N, PE ~ 230V, 50Hz | |
| Power input | 0,42kW | 0,6kW | 0,67kW |
| Current draw | 2,8A | 3A | 4,7A |
| Central cooled Power input / Current draw | | ~ 0,04kW / ~ 0,75A | |

With aggregate

| Model | Order number | Price |
|----------------------------------|----------------|-------|
| Straight/Inclined 5° - 2EN | V3-030400-0229 | |
| Straight/Inclined 5° - 3EN | V3-030400-0250 | |
| Straight/Inclined 5° - 4EN | V3-030400-0230 | |
| Straight/Inclined 5° - 4EN (2+2) | V3-030400-0252 | |

Central cooled

| Model | Order number | Price |
|----------------------------------|----------------|-------|
| Straight/Inclined 5° - 2EN | V3-030400-0253 | |
| Straight/Inclined 5° - 3EN | V3-030400-0254 | |
| Straight/Inclined 5° - 4EN | V3-030400-0255 | |
| Straight/Inclined 5° - 4EN (2+2) | V3-030400-0256 | |

If you want a larger size of the over ventilated cooling tub beyond these dimensions listed in the table, let us know.

* The evaporation tub is not included as a standard part of the product; it must be specified when placing the order. **Tub type - Non-foamed.**

About


Snack-Genie is used for the circulating of cooled air to keep all products at the ideal temperature. Thanks to free access to your products, the cooling tub allows easier handling for the service. To clean the tub bottom, the plate (with evaporator) can be folded upwards and locked in the top position. Suitable for slicing a cake and then easy to pick up.

The plate can be folded upwards with evaporator - 38° and locked in the top position.

It is suitable for restaurants, fast food, hospitals, canteens and many others. The tub contains a digital defrosting and digital temperature control.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

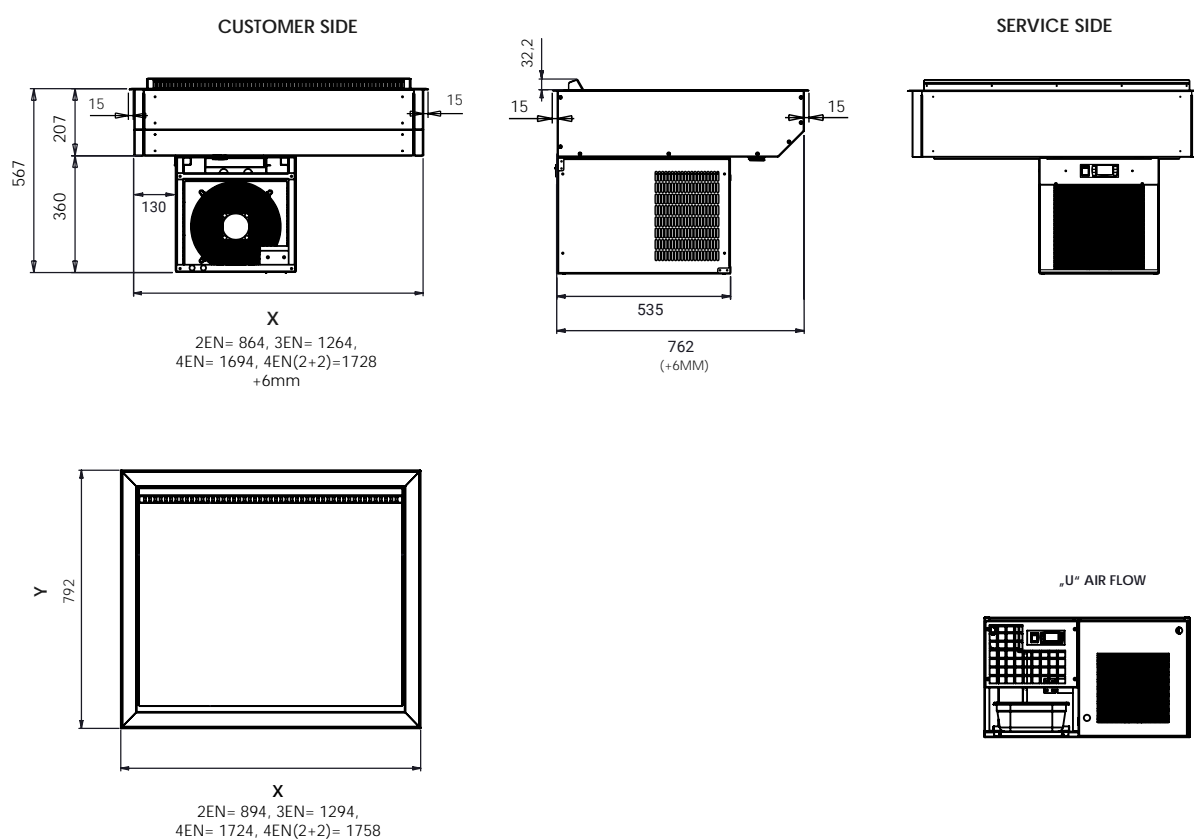

Illustrative pictures

2EN



3EN



4EN



4EN (2+2)



Specification list

| | 2EN | 3EN | 4EN / 4EN (2+2) |
|--|-----------------------|--------|-----------------|
| Outside dimension: | | | |
| Width (x) [mm] | 894 | 1294 | 1724 / 1758 |
| Depth (y) [mm] | 792 | | |
| Height (z) [mm] | 207 + 360 | | |
| Installation dimension: | | | |
| Width (x) [mm] | 870 | 1270 | 1700 / 1728 |
| Depth (y) [mm] | 768 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,48kW | 0,64kW | 0,85kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,42kW | 0,6kW | 0,67kW |
| Current draw | 2,8A | 3A | 4,7A |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,75A | | |

With aggregate

| Model | Order number | Price |
|-----------------------|----------------|-------|
| Snack-Genie 2EN | V3-030400-0103 | |
| Snack-Genie 3EN | V3-030400-0104 | |
| Snack-Genie 4EN | V3-030400-0105 | |
| Snack-Genie 4EN (2+2) | V4-030400-0169 | |

Central cooled

| Model | Order number | Price |
|-----------------------|----------------|-------|
| Snack-Genie 2EN | V3-030400-0110 | |
| Snack-Genie 3EN | V3-030400-0111 | |
| Snack-Genie 4EN | V3-030400-0112 | |
| Snack-Genie 4EN (2+2) | V4-030400-0170 | |

If you want a larger size of the over ventilated cooling tub beyond these dimensions listed in the table, let us know.

* The evaporation tub is not included as a standard part of the product; it must be specified when placing the order. **Tub type - Non-foamed.**

About


Gastro snack is used for cooling in GN containers such as sliced cakes, snacks, salad bowls or drinks. The circulation of cooled air keeps the goods at the ideal temperature and freshness. To clean the tub bottom, the plate (with evaporator) can be folded upwards and locked in the top position - 53°.

It is suitable for canteens, buffets, restaurants, hotels, hospitals and many others. The tub contains a digital defrosting and digital temperature control.

The tub is available in several size variants that can satisfy the customer's wishes.

Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

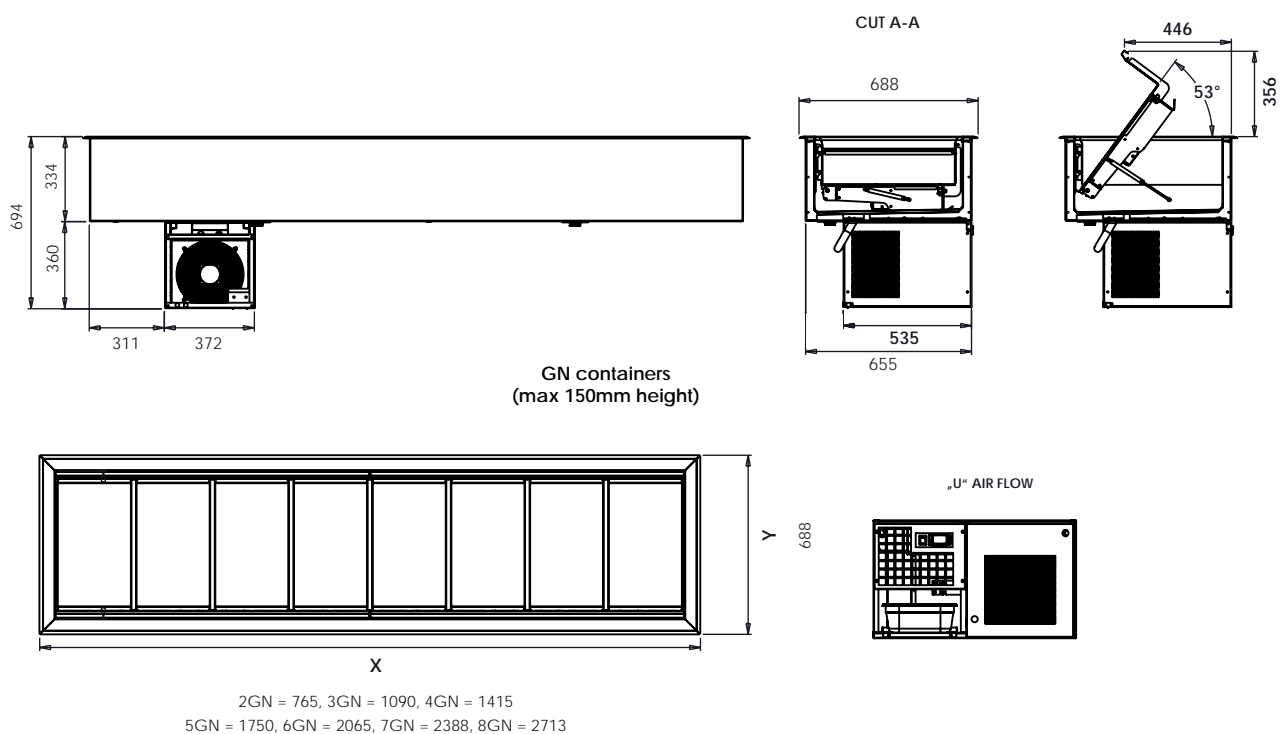

Illustrative pictures



Specification list

| | 2GN | 3GN | 4GN | 5GN |
|--|-----------------------|--------|--------|--------|
| Outside dimension: | | | | |
| Width (x) [mm] | 765 | 1090 | 1415 | 1750 |
| Depth (y) [mm] | 688 | | | |
| Height (z) [mm] | 334 + 360 | | | |
| Installation dimension: | | | | |
| Width (x) [mm] | 738 | 1063 | 1388 | 1713 |
| Depth (y) [mm] | 661 | | | |
| Temperature | +3°C ~ +8°C | | | |
| Cooling medium | R290 | | | |
| Refr. capacity (evap. @ -10°C) | 0,48kW | 0,64kW | 0,85kW | 1kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | | |
| Power input | 0,42kW | 0,6kW | 0,67kW | 0,67kW |
| Current draw | 2,8A | 3A | 4,7A | 4,7A |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,75A | | | |

| | 6GN | 7GN | 8GN |
|--|-----------------------|-------|-------|
| Outside dimension: | | | |
| Width (x) [mm] | 2065 | 2388 | 2713 |
| Depth (y) [mm] | 688 | | |
| Height (z) [mm] | 334 + 360 | | |
| Installation dimension: | | | |
| Width (x) [mm] | 2038 | 2361 | 2686 |
| Depth (y) [mm] | 661 | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 1,2kW | 1,4kW | 1,6kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | | |
| Power input | 0,9kW | 1,2kW | 1,3kW |
| Current draw | 4,7A | 5,8A | 6A |
| Central cooled Power input / Current draw | ~ 0,04kW / ~ 0,75A | | |

With aggregate

| Model | Order number | Price |
|------------------|----------------|-------|
| Gastro snack 2GN | V1-030400-0151 | |
| Gastro snack 3GN | V1-030400-0152 | |
| Gastro snack 4GN | V1-030400-0153 | |
| Gastro snack 5GN | V1-030400-0154 | |
| Gastro snack 6GN | V1-030400-0155 | |
| Gastro snack 7GN | V1-030400-0156 | |
| Gastro snack 8GN | V1-030400-0157 | |

Central cooled

| Model | Order number | Price |
|------------------|----------------|-------|
| Gastro snack 2GN | V1-030400-0158 | |
| Gastro snack 3GN | V1-030400-0159 | |
| Gastro snack 4GN | V1-030400-0160 | |
| Gastro snack 5GN | V1-030400-0161 | |
| Gastro snack 6GN | V1-030400-0162 | |
| Gastro snack 7GN | V1-030400-0163 | |
| Gastro snack 8GN | V1-030400-0164 | |


* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About

Cooling tub with various dimension widths: for optimum usage of space. Suitable for kitchen, canteens, restaurants or hospital. The primary use is to hold food that requires low temperature. Tub is used for the preparation, preservation and delivery of refrigerated food or beverages. Suitable for gastro containers.


Made from stainless steel material, so it is easy to clean and guarantees a long term service life.

Technical drawing

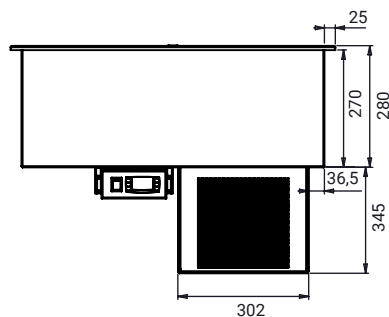


DROP-IN

1GN = 425, 2GN = 750, 3GN = 1075,
4GN = 1400, 5GN = 1725, 6GN = 2050





WELDED


1GN = 375 x 580, 2GN = 700 x 580, 3GN = 1025 x 580
4GN = 1350 x 580, 5GN = 1675 x 580, 6GN = 2000 x 580



SECTION D-D

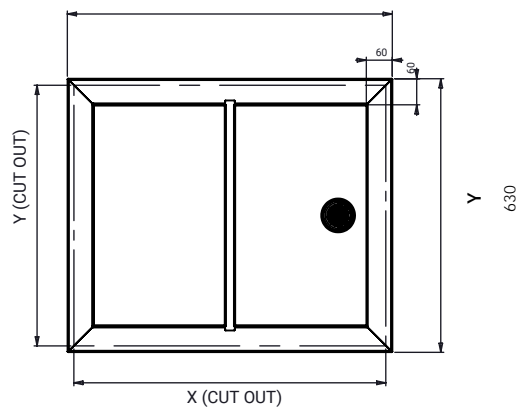

OUR PRODUCTION



PREMANUFACTURED

Illustrative pictures

1GN



2GN



3GN



4GN



5GN



6GN



Specification list

| | 1GN | 2GN | 3GN |
|--|--------|-----------------------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 425 | 750 | 1075 |
| Depth (y) [mm] | | 630 | |
| Height (z) [mm] | | 625 | |
| Installation dimension: | | | |
| Width (x) [mm] | 395 | 720 | 1045 |
| Depth (y) [mm] | | 595 | |
| Temperature | | +3°C ~ +8°C | |
| Cooling medium | | R600 | |
| Refr. capacity (evap. @ -10°C) | 0,14kW | 0,17kW | 0,28kW |
| Voltage | | 1, N, PE ~ 230V, 50Hz | |
| Power input | 0,18kW | 0,19kW | 0,2kW |
| Current draw | 1,1A | 1,3A | 1,4A |
| Central cooled Power input / Current draw | | ~ 0,03kW / ~ 0,25A | |

| | 4GN | 5GN | 6GN |
|--|--------|-----------------------|--------|
| Outside dimension: | | | |
| Width (x) [mm] | 1400 | 1725 | 2050 |
| Depth (y) [mm] | | 630 | |
| Height (z) [mm] | | 625 | |
| Installation dimension: | | | |
| Width (x) [mm] | 1370 | 1695 | 2020 |
| Depth (y) [mm] | | 595 | |
| Temperature | | +3°C ~ +8°C | |
| Cooling medium | | R290 | |
| Refr. capacity (evap. @ -10°C) | 0,35kW | 0,35kW | 0,42kW |
| Voltage | | 1, N, PE ~ 230V, 50Hz | |
| Power input | 0,22kW | 0,24kW | 0,24kW |
| Current draw | 1,4A | 1,6A | 1,6A |
| Central cooled Power input / Current draw | | ~ 0,03kW / ~ 0,25A | |

Our production

With aggregate

| Model | Order number | Price |
|-----------------------|----------------|-------|
| Our production | | |
| 1GN - static, welded | V1-030500-0029 | |
| 2GN - static, welded | V1-030500-0030 | |
| 3GN - static, welded | V1-030500-0031 | |
| 4GN - static, welded | V1-030500-0032 | |
| 5GN - static, welded | V1-030500-0033 | |
| 6GN - static, welded | V1-030500-0034 | |
| | | |
| 1GN - static, drop-in | V1-030500-0001 | |
| 2GN - static, drop-in | V1-030500-0002 | |
| 3GN - static, drop-in | V1-030500-0003 | |
| 4GN - static, drop-in | V1-030500-0004 | |
| 5GN - static, drop-in | V1-030500-0005 | |
| 6GN - static, drop-in | V1-030500-0006 | |

Central cooled

| Model | Order number | Price |
|-----------------------|----------------|-------|
| Our production | | |
| 1GN - static, welded | V1-030500-0035 | |
| 2GN - static, welded | V1-030500-0036 | |
| 3GN - static, welded | V1-030500-0037 | |
| 4GN - static, welded | V1-030500-0038 | |
| 5GN - static, welded | V1-030500-0039 | |
| 6GN - static, welded | V1-030500-0040 | |
| | | |
| 1GN - static, drop-in | V1-030500-0007 | |
| 2GN - static, drop-in | V1-030500-0008 | |
| 3GN - static, drop-in | V1-030500-0009 | |
| 4GN - static, drop-in | V1-030500-0010 | |
| 5GN - static, drop-in | V1-030500-0011 | |
| 6GN - static, drop-in | V1-030500-0012 | |

Premanufactured

With aggregate

| Model | Order number | Price |
|-------------------------------|----------------|-------|
| Premanufactured tub | | |
| 1GN pressed - static, welded | V1-030500-0013 | |
| 2GN pressed - static, welded | V1-030500-0014 | |
| 3GN pressed - static, welded | V1-030500-0015 | |
| 4GN pressed - static, welded | V1-030500-0016 | |
| | | |
| 1GN pressed - static, drop-in | V1-030500-0021 | |
| 2GN pressed - static, drop-in | V1-030500-0022 | |
| 3GN pressed - static, drop-in | V1-030500-0023 | |
| 4GN pressed - static, drop-in | V1-030500-0024 | |

Central cooled

| Model | Order number | Price |
|-------------------------------|----------------|-------|
| Premanufactured tub | | |
| 1GN pressed - static, welded | V1-030500-0017 | |
| 2GN pressed - static, welded | V1-030500-0018 | |
| 3GN pressed - static, welded | V1-030500-0019 | |
| 4GN pressed - static, welded | V1-030500-0020 | |
| | | |
| 1GN pressed - static, drop-in | V1-030500-0025 | |
| 2GN pressed - static, drop-in | V1-030500-0026 | |
| 3GN pressed - static, drop-in | V1-030500-0027 | |
| 4GN pressed - static, drop-in | V1-030500-0028 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

BEVERAGE COOLING TABLE


About

The primary use is for the storage of beverages. Cooling tables are available with different numbers of chambers for optimal use of space. The tables come with doors or drawers that can be combined. The drawers slide out on

telescopic rails, which allow easy pulling out and easy removal or loading of used gastro containers.


Made from stainless steel material, so it is easy to clean and guarantees a long-term service life.

Technical drawing

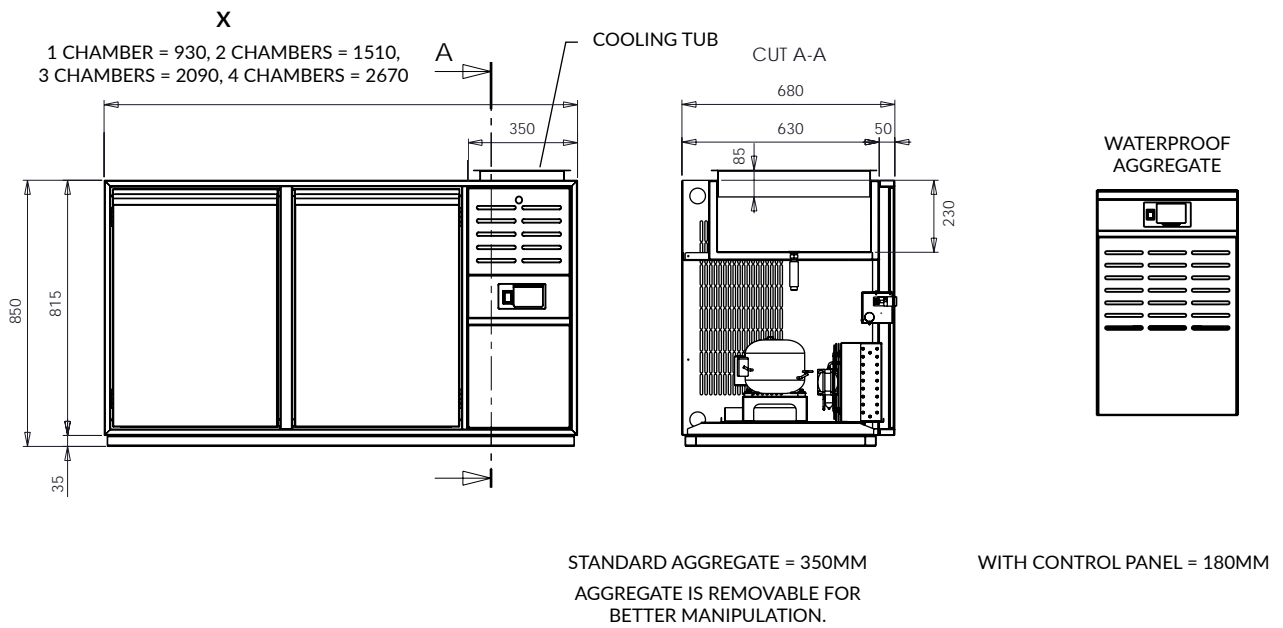


Types of drawers and doors:

COOLING TUB



SKUFFER 5/12 + 7/12

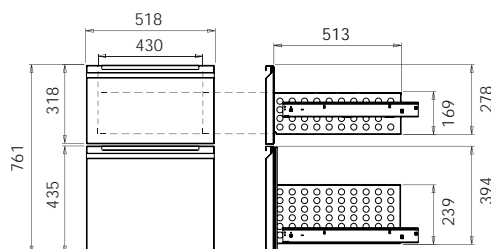

Drawers 1/2+1/2

Drawers 1/3+1/3+1/3

Drawers 1/3+2/3

Drawers 5/12+7/12

Drawers 7/12+5/12

Standard door

Glass doors

- maximum bottle height:

1/2 = 295mm

1/3 = 167mm

5/12 = 237mm

7/12 = 354mm

2/3 = 423mm

Illustrative pictures

1 chamber



2 chambers



3 chambers



4 chambers



Specification list

| | 1 chamber | 2 chambers | 3 chambers | 4 chambers |
|---|------------------------|------------|------------|------------|
| Outside dimension Width (x) [mm] With standard aggregate (350mm) | 930 | 1510 | 2090 | 2670 |
| Outside dimension Width (x) [mm] Without aggregate | 580 | 1160 | 1740 | 2320 |
| Outside dimension Width (x) [mm] With Control panel (180mm) | 760 | 1340 | 1920 | 2500 |
| Outside dimension Depth (y) x Height (z) [mm] | 680 x 815 | | | |
| Insulation | 45mm | | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | | |
| Temperature | +3°C ~ +8°C | | | |
| Cooling medium | R600 | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,17kW | 0,35kW | 0,42kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | |
| Power input | 0,42kW | 0,57kW | 0,63kW | 0,63kW |
| Current draw | 2,4A | 3,1A | 3,3A | 3,3A |
| Central cooled Power input / Current draw | ~ 0,07kW / ~ 0,5A | | | |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| 1 chamber with door, right aggregate | V2-030601-0100 | |
| 1 chamber with door, left aggregate | V2-030601-0101 | |
| 2 chambers with doors, right aggregate | V2-030601-0104 | |
| 2 chambers with doors, left aggregate | V2-030601-0105 | |
| 3 chambers with doors, right aggregate | V2-030601-0108 | |
| 3 chambers with doors, left aggregate | V2-030601-0109 | |
| 4 chambers with doors, right aggregate | V2-030601-0112 | |
| 4 chambers with doors, left aggregate | V2-030601-0113 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| 1 chamber with door, right control panel | V2-030601-0102 | |
| 1 chamber with door, left control panel | V2-030601-0103 | |
| 2 chambers with doors, right control panel | V2-030601-0106 | |
| 2 chambers with doors, left control panel | V2-030601-0107 | |
| 3 chambers with doors, right control panel | V2-030601-0110 | |
| 3 chambers with doors, left control panel | V2-030601-0111 | |
| 4 chambers with doors, right control panel | V2-030601-0114 | |
| 4 chambers with doors, left control panel | V2-030601-0115 | |

Accessories

| Accessories | Order number | Price |
|-------------------------|----------------|-------|
| Drawers 1/2 + 1/2 | V2-030601-0116 | |
| Drawers 1/3 + 2/3 | V2-030601-0117 | |
| Drawers 1/3 + 1/3 + 1/3 | V2-030601-0118 | |
| Drawers 5/12 + 7/12 | V2-030601-0119 | |
| Drawers 7/12 + 5/12 | V2-030601-0120 | |
| Standard door | V2-030601-0121 | |
| Glass door | V2-030601-0122 | |

* For the specific configuration
of your Cooling table, write to us.

** Possibility to convert this beverage cooling table
into a table suitable for KEG barrels.
For more information, write to us.



*** The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About


GN refrigerated tables are primarily for gastronomes. The tables come with doors or drawers that can be combined. The drawers slide out on telescopic rails, which allow easy pulling out and easy removal or loading of used gastro

containers. Made of stainless steel, so it is easy to clean and guarantees long life.

Technical drawing & Illustrative pictures

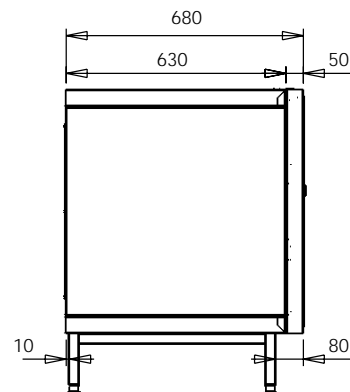
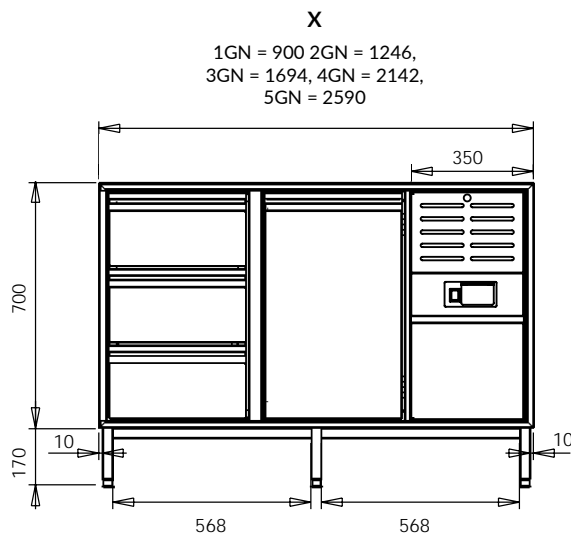


WATERPROOF
AGGREGATE



STANDARD AGGREGATE = 350MM
AGGREGATE IS REMOVABLE FOR
BETTER MANIPULATION.

WITH CONTROL PANEL = 180MM

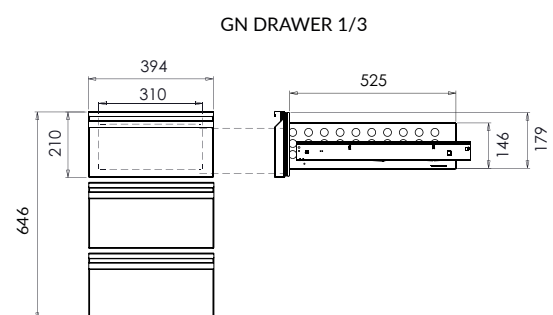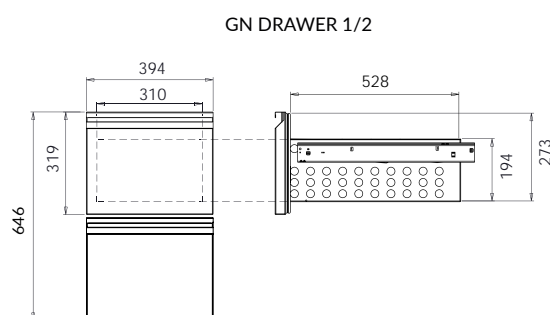

Types of drawers and doors:

- Drawers 1/2+1/2
- Drawers 1/3+1/3+1/3
- Standard door
- Glass doors

Illustrative pictures

1GN



2GN



3GN



4GN



5GN



Specification list

| | 1GN | 2GN | 3GN | 4GN | 5GN |
|---|------------------------|--------|--------|--------|--------|
| Outside dimension Width (x) [mm] With standard aggregate (350mm) | 900 | 1246 | 1694 | 2142 | 2590 |
| Outside dimension Width (x) [mm] Without aggregate | 550 | 896 | 1344 | 1792 | 2240 |
| Outside dimension Width (x) [mm] With Control panel (180mm) | 730 | 1076 | 1524 | 1972 | 2420 |
| Outside dimension Depth (y) x Height (z) [mm] | 680 x 700 | | | | |
| Insulation | 45mm | | | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | | | |
| Temperature | +3°C ~ +8°C | | | | |
| Cooling medium | R600 | R290 | | | |
| Refr. capacity (evap. @ -10°C) | 0,17kW | 0,35kW | 0,42kW | 0,42kW | 0,48kW |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | | |
| Power input | 0,42kW | 0,57kW | 0,63kW | 0,63kW | 0,64kW |
| Current draw | 2,4A | 3,1A | 3,3A | 3,3A | 3,3A |
| Central cooled Power input / Current draw | ~ 0,07kW / ~ 0,5A | | | | |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| 1 chamber with door, right aggregate | V2-030602-0100 | |
| 1 chamber with door, left aggregate | V2-030602-0101 | |
| 2 chambers with doors, right aggregate | V2-030602-0104 | |
| 2 chambers with doors, left aggregate | V2-030602-0105 | |
| 3 chambers with doors, right aggregate | V2-030602-0108 | |
| 3 chambers with doors, left aggregate | V2-030602-0109 | |
| 4 chambers with doors, right aggregate | V2-030602-0112 | |
| 4 chambers with doors, left aggregate | V2-030602-0113 | |
| 5 chambers with doors, right aggregate | V2-030602-0116 | |
| 5 chambers with doors, left aggregate | V2-030602-0117 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| 1 chamber with door, right control panel | V2-030602-0102 | |
| 1 chamber with door, left control panel | V2-030602-0103 | |
| 2 chambers with doors, right control panel | V2-030602-0106 | |
| 2 chambers with doors, left control panel | V2-030602-0107 | |
| 3 chambers with doors, right control panel | V2-030602-0110 | |
| 3 chambers with doors, left control panel | V2-030602-0111 | |
| 4 chambers with doors, right control panel | V2-030602-0114 | |
| 4 chambers with doors, left control panel | V2-030602-0115 | |
| 5 chambers with doors, right control panel | V2-030602-0118 | |
| 5 chambers with doors, left control panel | V2-030602-0119 | |

Accessories

| Accessories | Order number | Price |
|-------------------------|----------------|-------|
| Drawers 1/2 + 1/2 | V2-030602-0120 | |
| Drawers 1/3 + 1/3 + 1/3 | V2-030602-0121 | |
| Standard door | V2-030602-0122 | |
| Glass door | V2-030602-0123 | |

* For the specific configuration of your Cooling table,
write to us.


** The evaporation tub is not included as a standard
part of the product; it must be specified
when placing the order.

About

Refrigerated tables are primarily for gastronomy. The tables come with doors or drawers that can be combined. The drawers slide out on telescopic rails, which allow easy pulling out and easy removal or loading

of used gastro containers. This lowered cooling table allows better use of space - height is 460mm or 520mm. Made of stainless steel, so it is easy to clean and guarantees long life.

Technical drawing & Illustrative pictures

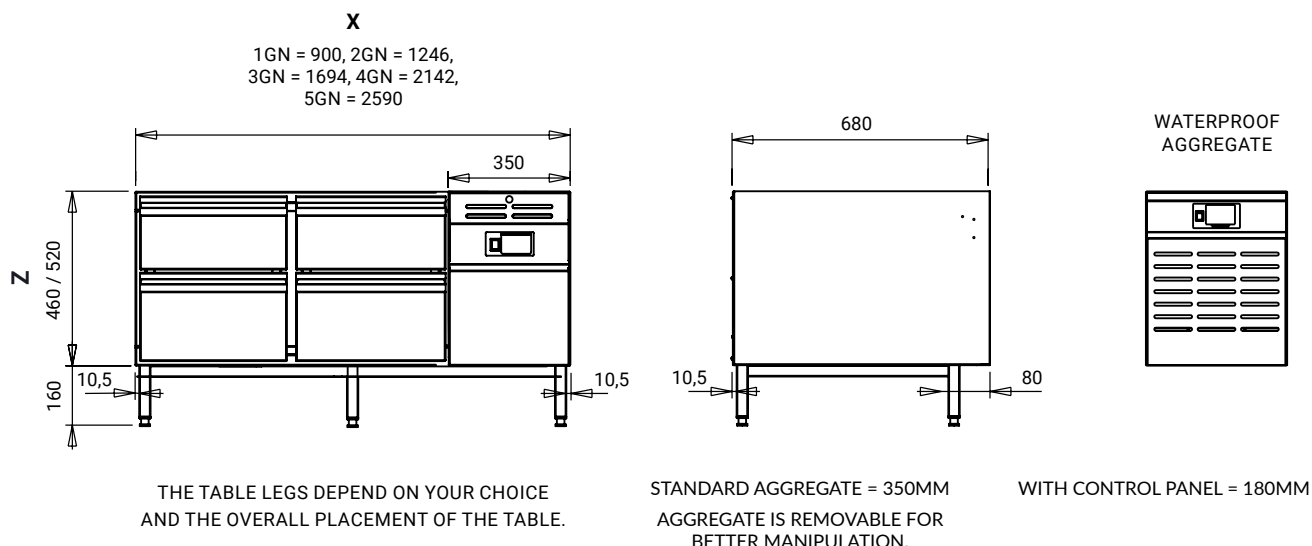

Specification list

| | 1GN | 2GN | 3GN | 4GN | 5GN |
|--|------------------------|--------|--------|--------|--------|
| Outside dimension Width (x) [mm] With aggregate (350mm) | 900 | 1316 | 1748 | 2180 | 2612 |
| Outside dimension Width (x) [mm] Without aggregate | 550 | 864 | 1296 | 1728 | 2160 |
| Outside dimension Width (x) [mm] With Control panel (180mm) | 730 | 1044 | 1476 | 1908 | 2340 |
| Outside dimension Depth (y) x Height (z) [mm] | 680 x 460/520 | | | | |
| Insulation | 45mm | | | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | | | |
| Temperature | +3°C ~ +8°C | | | | |
| Cooling medium | R600 | R290 | | | |
| Refr. capacity (evap. @ -10°C) | 0,13kW | 0,17kW | 0,28kW | 0,35kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | | |
| Power input | 0,1kW | 0,15kW | 0,22kW | 0,24kW | 0,28kW |
| Central cooled Refr. capacity / Current draw | ~ 0,07kW / ~ 0,5A | | | | |

* For the specific configuration of your Cooling table, write to us.


** The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.

About

Saladette with drawers and tubs. There is a polypropylene cutting board in the front part of the product and a stainless steel hinged lid in the back part, where you can place GN 1/1 gastro containers. It contains four adjustable feet and a digital thermostat.

Saladette has valve cooling inside and has automatic defrosting. It is suitable for restaurants, fast food, hotels, hospitals, or canteens. Made of stainless steel, so it is easy to clean and guarantees long life.

Technical drawing

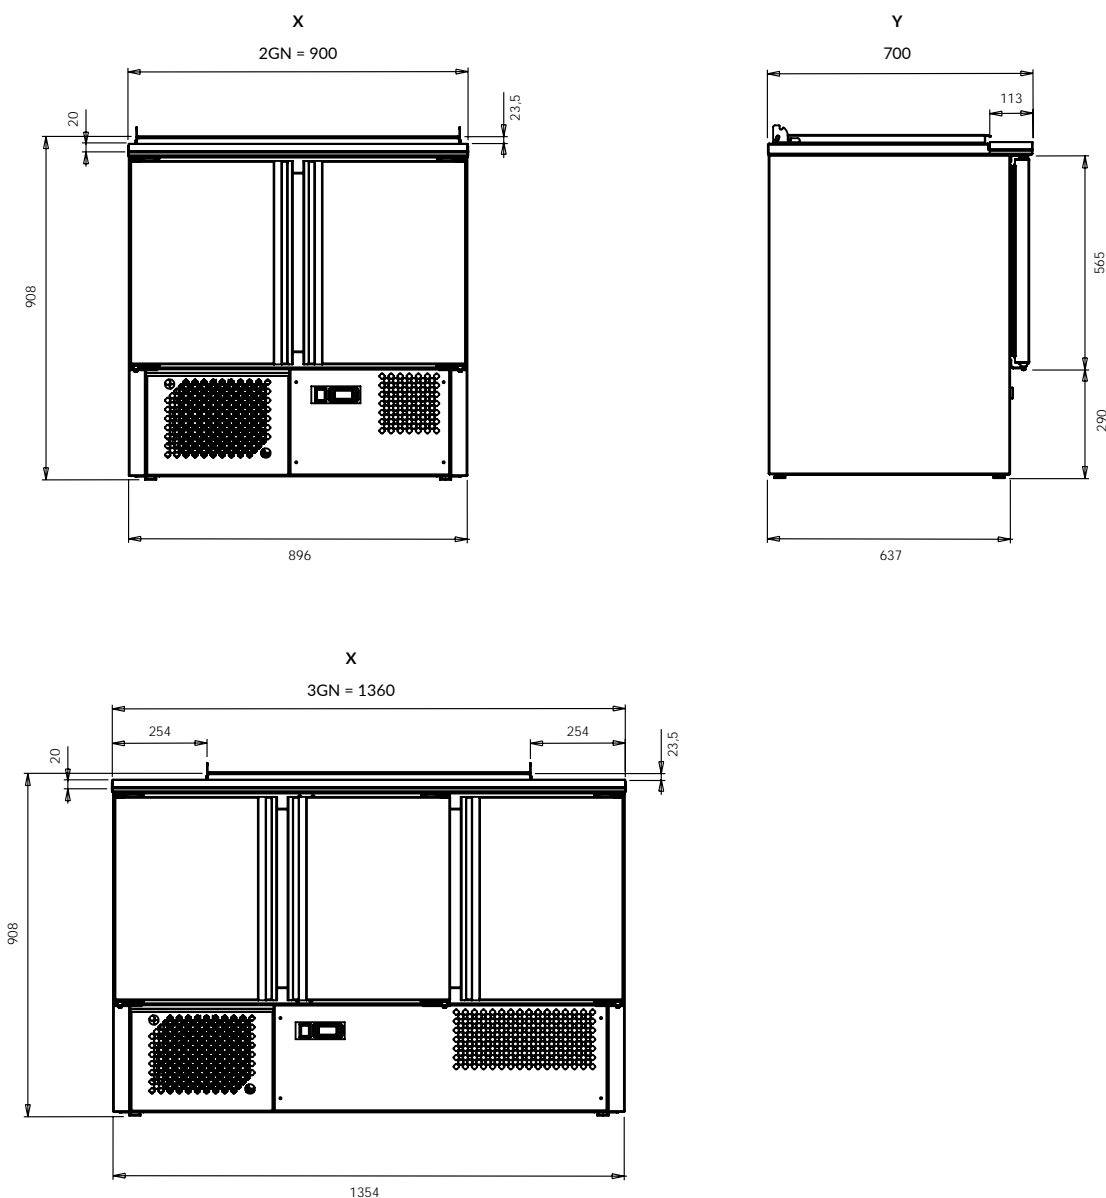

Illustrative pictures

2GN



3GN



Specification list

| | 2GN | 3GN |
|--------------------------------|-----------------------|--------|
| Outside dimension: | | |
| Width (x) [mm] | 900 | 1360 |
| Depth (y) [mm] | 700 | |
| Height (z) [mm] | 908 | |
| Temperature | +3°C ~ +8°C | |
| Cooling medium | R600 | R290 |
| Refr. capacity (evap. @ -10°C) | 0,35kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V, 50Hz | |
| Power input | 0,22kW | 0,6kW |
| Current draw | 1,4A | 2,4A |

With aggregate

| Model | Order number | Price |
|------------------------|----------------|-------|
| Saladette 2GN, drawers | V1-030607-0001 | |
| Saladette 3GN, drawers | V1-030607-0002 | |
| | | |
| Saladette 2GN, doors | V1-030607-0005 | |
| Saladette 3GN, doors | V1-030607-0006 | |

* Saladette does not include top plate. It must be ordered separately.


** The evaporation tub is not included as a standard part of the product; it must be specified when placing the order.

About

This type of cooling counter has a glass extension and a cooling tub for small GN containers. The three middle drawers are cooled and the rest are neutral. There is a cutout in the top plate for your heating device.

It is suitable for restaurants, fast food, hotels, hospitals, or canteens. Made of stainless steel, so it is easy to clean and guarantees long life.

Technical drawing

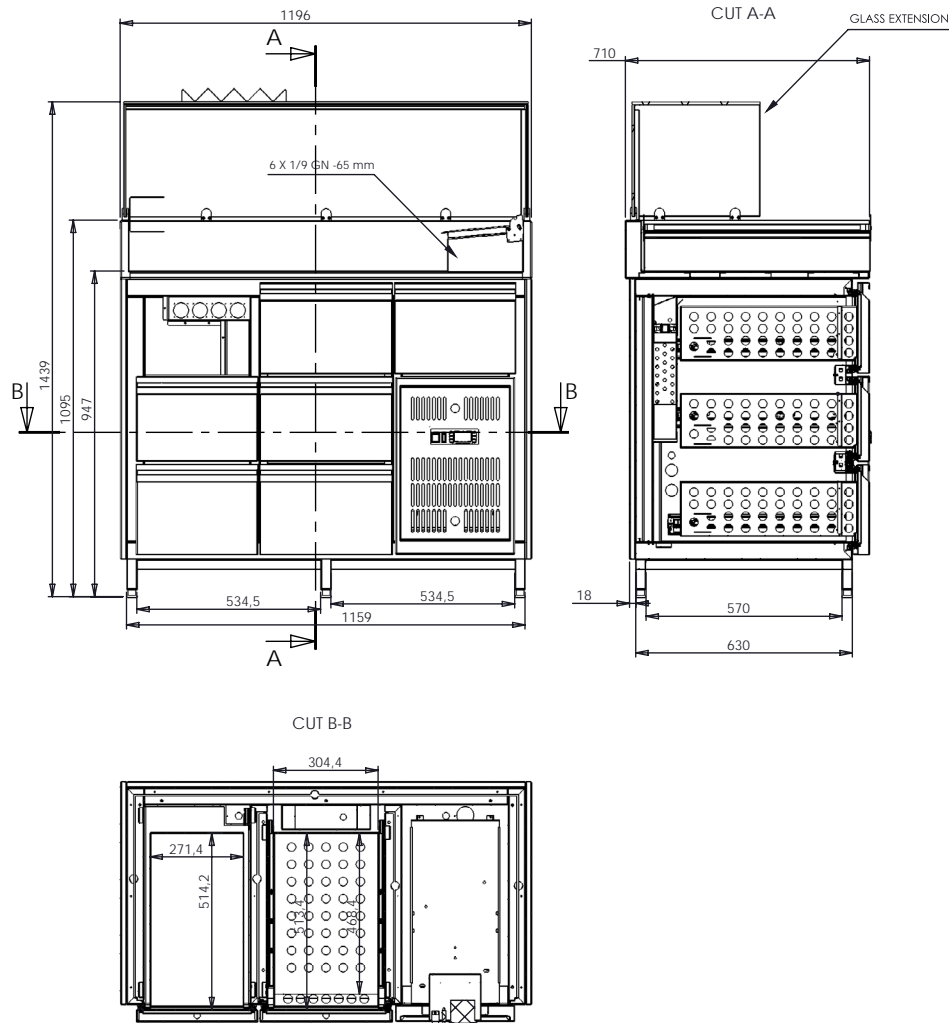

Illustrative pictures



Specification list

| | |
|--------------------------------|-----------------------|
| Outside dimension: | |
| Width (x) [mm] | 1196 |
| Depth (y) [mm] | 710 |
| Height (z) [mm] | 1439 |
| Temperature | +3°C ~ +8°C |
| Cooling medium | R290 |
| Refr. capacity (evap. @ -10°C) | 0,42kW |
| Voltage | 1, N, PE ~ 230V, 50Hz |
| Power input | 0,7kW |
| Current draw | 1,3A |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| Cooling sausage counter, drawers, 3 sides stainless steel | V1-030608-0001 | |
| Cooling sausage counter, drawers, 3 sides galvanized | V1-030608-0002 | |

central cooled

| Model | Order number | Price |
|---|----------------|-------|
| Cooling sausage counter, drawers, 3 sides stainless steel | V1-030608-0003 | |
| Cooling sausage counter, drawers, 3 sides galvanized | V1-030608-0004 | |

** The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.



About

Freezer tables are available with different numbers of chambers for optimal use of space. Use for storage of frozen goods. The tables come with doors or drawers that can be combined. The drawers slide out on telescopic


rails, which allow easy pulling out and easy removal or loading of used gastro containers.

Made from stainless steel material, so it is easy to clean and guarantees a long-term service life.

Technical drawing & Illustrative pictures

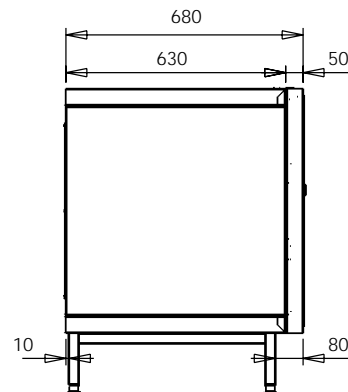
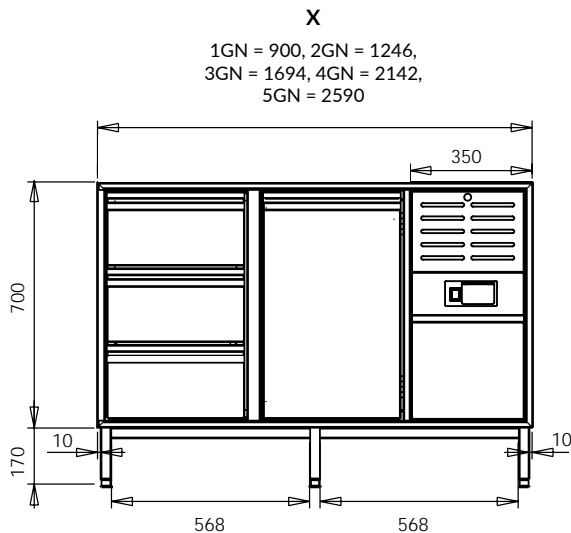


WATERPROOF
AGGREGATE



STANDARD AGGREGATE = 350MM
 AGGREGATE IS REMOVABLE FOR
 BETTER MANIPULATION.

WITH CONTROL PANEL = 180MM

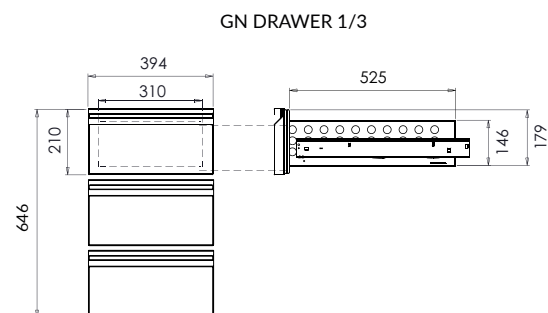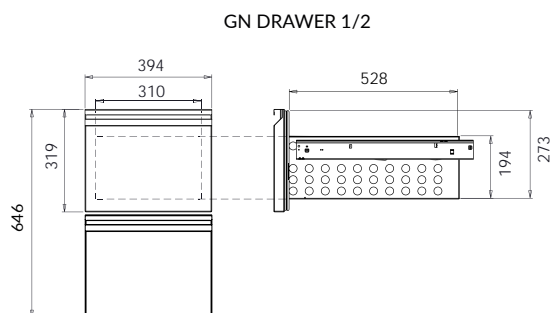

Types of drawers and doors:

Drawers 1/2+1/2

Drawers 1/3+1/3+1/3

Standard door

Glass doors

Illustrative pictures

1GN



2GN



3GN



4GN



5GN



Specification list

| | 1GN | 2GN | 3GN | 4GN | 5GN |
|---|------------------------|--------|--------|--------|-------|
| Outside dimension Width (x) [mm] With standard aggregate (350mm) | 900 | 1246 | 1694 | 2142 | 2590 |
| Outside dimension Width (x) [mm] Without aggregate | 550 | 896 | 1344 | 1792 | 2240 |
| Outside dimension Width (x) [mm] With Control panel (180mm) | 730 | 1076 | 1524 | 1972 | 2420 |
| Outside dimension Depth (y) x Height (z) [mm] | 680 x 700 | | | | |
| Insulation | 45mm | | | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | | | |
| Temperature | -22°C ~ -19°C | | | | |
| Cooling medium | R290 | | | | |
| Refr. capacity (evap. @ -30°C) | 0,21kW | 0,24kW | 0,4kW | 0,64kW | 0,8kW |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | | |
| Power input | 0,36kW | 0,61kW | 0,55kW | 0,64kW | 0,8kW |
| Current draw | 2A | 2,8A | 2,6A | 3,6A | 4A |
| Central cooled Power input / Current draw | ~ 0,05kW / ~ 0,5A | | | | |

With aggregate

| Model | Order number | Price |
|---|----------------|-------|
| 1 chamber with door, right aggregate | V2-030701-0100 | |
| 1 chamber with door, left aggregate | V2-030701-0101 | |
| 2 chambers with doors, right aggregate | V2-030701-0104 | |
| 2 chambers with doors, left aggregate | V2-030701-0105 | |
| 3 chambers with doors, right aggregate | V2-030701-0108 | |
| 3 chambers with doors, left aggregate | V2-030701-0109 | |
| 4 chambers with doors, right aggregate | V2-030701-0112 | |
| 4 chambers with doors, left aggregate | V2-030701-0113 | |
| 5 chambers with doors, right aggregate | V2-030701-0116 | |
| 5 chambers with doors, left aggregate | V2-030701-0117 | |

Central cooled

| Model | Order number | Price |
|---|----------------|-------|
| 1 chamber with door, right control panel | V2-030701-0102 | |
| 1 chamber with door, left control panel | V2-030701-0103 | |
| 2 chambers with doors, right control panel | V2-030701-0106 | |
| 2 chambers with doors, left control panel | V2-030701-0107 | |
| 3 chambers with doors, right control panel | V2-030701-0110 | |
| 3 chambers with doors, left control panel | V2-030701-0111 | |
| 4 chambers with doors, right control panel | V2-030701-0114 | |
| 4 chambers with doors, left control panel | V2-030701-0115 | |
| 5 chambers with doors, right control panel | V2-030701-0118 | |
| 5 chambers with doors, left control panel | V2-030701-0119 | |

Accessories

| Accessories | Order number | Price |
|-------------------------|----------------|-------|
| Drawers 1/2 + 1/2 | V2-030701-0120 | |
| Drawers 1/3 + 1/3 + 1/3 | V2-030701-0121 | |
| Standard door | V2-030701-0122 | |
| Glass door | V2-030701-0123 | |

* For the specific configuration of your Cooling table,
write to us.

** The evaporation tub is not included as a standard
part of the product; it must be specified
when placing the order.


About

The cooling box is designed for bins and is available in three size variants named as XL, L and M. It is also available with different numbers of chambers for optimal use of space. Easy insertion and removing of bins.

Each of these variants has three types - with aggregate, without it (neutral) or with aggregate + heating element.

Made from stainless steel material, so it is easy to clean and guarantees a long-term service life.

Technical drawing

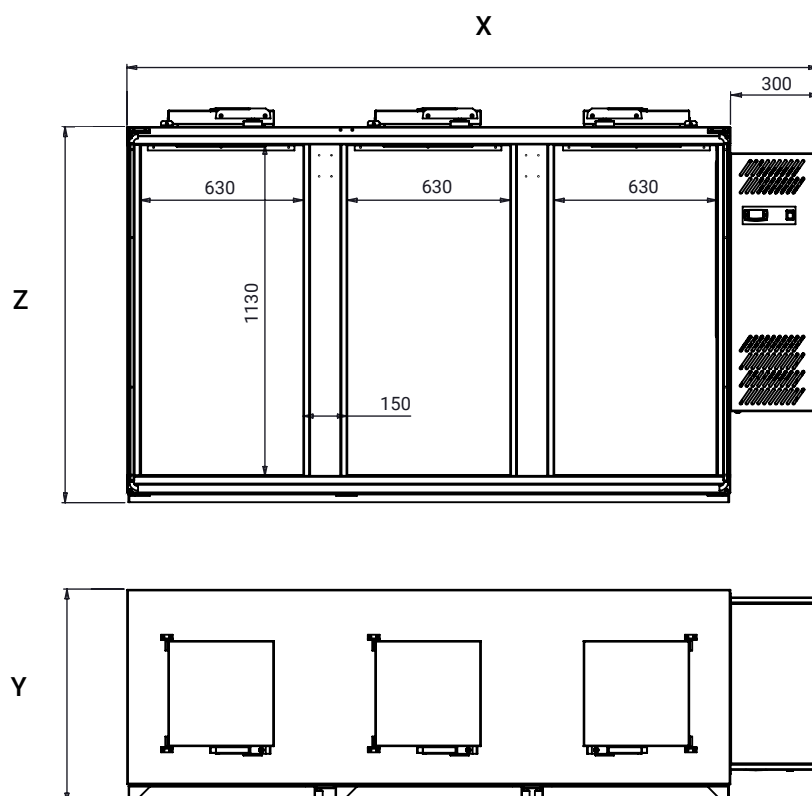

Illustrative pictures



Specification list

| | 1x dustbin | | | 2x dustbin | | |
|--|------------------------|-----------|-----------|-------------|-------------|-------------|
| Outside dimension: | 1XL | 1L | 1M | 2XL | 2L | 2M |
| Width (x) [mm] without aggregate | 1020 720 | 975 675 | 945 645 | 1800 1500 | 1710 1410 | 1650 1350 |
| Depth (y) [mm] | 958 | 870 | 730 | 958 | 870 | 730 |
| Height (z) [mm] | 1335 | 1265 | 1125 | 1335 | 1265 | 1125 |
| Isolation | 45mm | | | | | |
| Noise (distance 1m) | 35 - 50 dB(A) | | | | | |
| Temperature | +3°C ~ +8°C | | | | | |
| Cooling medium | R290 | | | | | |
| Refr. capacity (evap. @ -10°C) | 0,42kW | | | 0,48kW | | |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | | | |
| Power input | 0,24kW | | | 0,3kW | | |
| Current draw | 1,7A | | | 2A | | |
| Central cooled Power input / Current draw | ~ 0,05kW / ~ 0,5A | | | | | |

| | 3x dustbin | | |
|--|------------------------|-------------|-------------|
| Outside dimension: | 3XL | 3L | 3M |
| Width (x) [mm] without aggregate | 2580 2280 | 2445 2145 | 2355 2055 |
| Depth (y) [mm] | 958 | 870 | 730 |
| Height (z) [mm] | 1335 | 1265 | 1125 |
| Isolation | 45mm | | |
| Noise (distance 1m) | 35 - 50 dB(A) | | |
| Temperature | +3°C ~ +8°C | | |
| Cooling medium | R290 | | |
| Refr. capacity (evap. @ -10°C) | 0,55kW | | |
| Voltage | 1, N, PE ~ 230V / 50Hz | | |
| Power input | 0,3kW | | |
| Current draw | 2A | | |
| Central cooled Power input / Current draw | ~ 0,05kW / ~ 0,5A | | |

| Model | Order number | Price |
|--|----------------|-------|
| Box for dustbin 1XL | V1-031000-0001 | |
| Box for dustbin 2XL | V1-031000-0004 | |
| Box for dustbin 3XL | V1-031000-0007 | |
| | | |
| Box for dustbin 1XL, without aggregate | V1-031000-0002 | |
| Box for dustbin 2XL, without aggregate | V1-031000-0005 | |
| Box for dustbin 3XL, without aggregate | V1-031000-0008 | |
| | | |
| Box for dustbin 1XL + heating el. | V1-031000-0003 | |
| Box for dustbin 2XL + heating el. | V1-031000-0006 | |
| Box for dustbin 3XL + heating el. | V1-031000-0009 | |

| Model | Order number | Price |
|---------------------------------------|----------------|-------|
| Box for dustbin 1L | V1-031000-0010 | |
| Box for dustbin 2L | V1-031000-0013 | |
| Box for dustbin 3L | V1-031000-0016 | |
| | | |
| Box for dustbin 1L, without aggregate | V1-031000-0011 | |
| Box for dustbin 2L, without aggregate | V1-031000-0014 | |
| Box for dustbin 3L, without aggregate | V1-031000-0017 | |
| | | |
| Box for dustbin 1L + heating el. | V1-031000-0012 | |
| Box for dustbin 2L + heating el. | V1-031000-0015 | |
| Box for dustbin 3L + heating el. | V1-031000-0018 | |

| Model | Order number | Price |
|---------------------------------------|----------------|-------|
| Box for dustbin 1M | V1-031000-0019 | |
| Box for dustbin 2M | V1-031000-0022 | |
| Box for dustbin 3M | V1-031000-0025 | |
| | | |
| Box for dustbin 1M, without aggregate | V1-031000-0020 | |
| Box for dustbin 2M, without aggregate | V1-031000-0023 | |
| Box for dustbin 3M, without aggregate | V1-031000-0026 | |
| | | |
| Box for dustbin 1M + heating el. | V1-031000-0021 | |
| Box for dustbin 2M + heating el. | V1-031000-0024 | |
| Box for dustbin 3M + heating el. | V1-031000-0027 | |

* The evaporation tub is not included as a standard part of the product;
it must be specified when placing the order.


About

The plate has two functions: The first function is the preparation, storage and serving of chilled foods that require a low temperature. The second function is to keep food warm and ready to serve. Free access and food that can be arranged for an ideal presentation to customers.

Suitable for restaurant, fast food, hotel, dining room or hospitals and other gastronomic facilities.

Made of stainless steel material, so it is easy to clean and guarantees a long service life.

Technical drawing

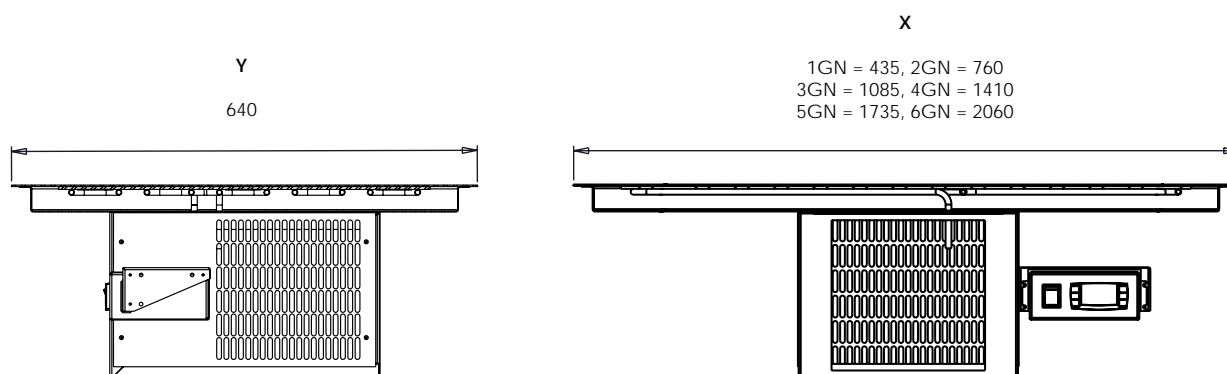

Specification list

| | 1GN | 2GN | 3GN | 4GN | 5GN | 6GN |
|--|--|------------------|------------------|------------------|------------------|------------------|
| Outside dimension: | | | | | | |
| Width (x) [mm] | 435 | 760 | 1085 | 1410 | 1735 | 2060 |
| Depth (y) [mm] | 640 | | | | | |
| Installation dimension: | | | | | | |
| Width (x) x Depth (y) [mm] | 415 x 620 | 740 x 620 | 1065 x 620 | 1390 x 620 | 1715 x 620 | 2040 x 620 |
| Isolation | 45mm | | | | | |
| Noise (distance 1m) | 35 - 50 dB(A) | | | | | |
| Temperature | +3°C ~ +8°C (Cooling) / +30°C ~ +100°C (Heating) | | | | | |
| Cooling medium | R290 | | | | | |
| Refr. capacity (evap. @ -10°C) | 0,13kW | 0,17kW | 0,28kW | 0,35kW | 0,35kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | | | |
| Power input: Cooling / Heating | 0,12kW / 0,33kW | 0,17kW / 0,66kW | 0,23kW / 0,99kW | 0,26kW / 0,99kW | 0,26kW / 1,1kW | 0,26kW / 1,2kW |
| Central cooled Refr. capacity / Power input | 0,13kW / ~ 0,1kW | 0,17kW / ~ 0,1kW | 0,28kW / ~ 0,1kW | 0,35kW / ~ 0,1kW | 0,35kW / ~ 0,1kW | 0,42kW / ~ 0,1kW |

| Model | Order number | Price | Model | Order number | Price |
|---------------------------|----------------|-------|---------------------------|----------------|-------|
| Heating-Cooling plate 1GN | V1-070100-0001 | | Heating-Cooling plate 4GN | V1-070100-0004 | |
| Heating-Cooling plate 2GN | V1-070100-0002 | | Heating-Cooling plate 5GN | V1-070100-0005 | |
| Heating-Cooling plate 3GN | V1-070100-0003 | | Heating-Cooling plate 6GN | V1-070100-0006 | |

* The evaporation tub is not included as a standard part of the product; it must be specified when placing the order.